


Recommended P.C.B Layout

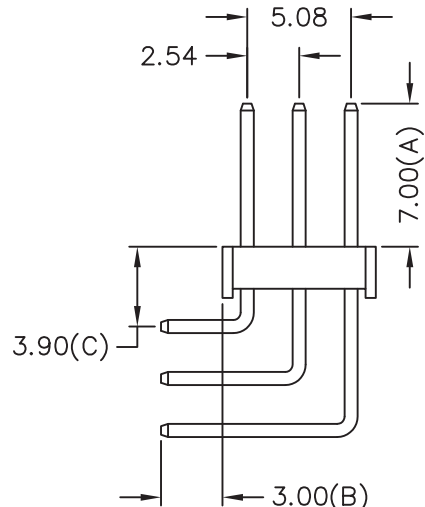

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute

H-R7030-3X08-LF
 LEADFREE
 RoHS Compliant

	PART NO. H-R7030-3X08		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, TRIPLE ROWS	AREA	REVISIONS	HK	DATE
	DWG NO. H-R7030-3X08							
焯倫股份有限公司	FILE NO.		DRAWING BY					
	UNIT / mm	SCALE 1:1	PROJECTION					