

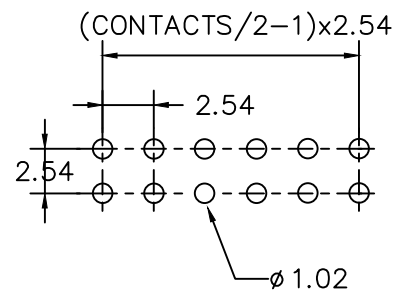
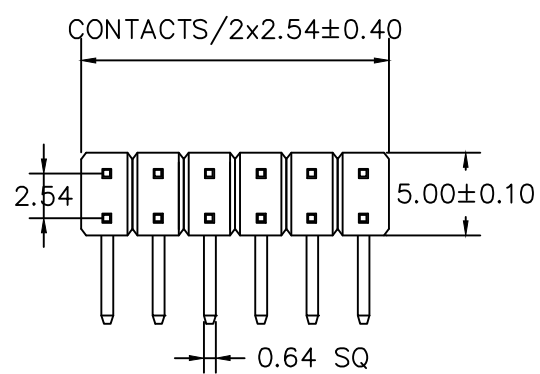


MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION
 CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : AC 1000V RMS

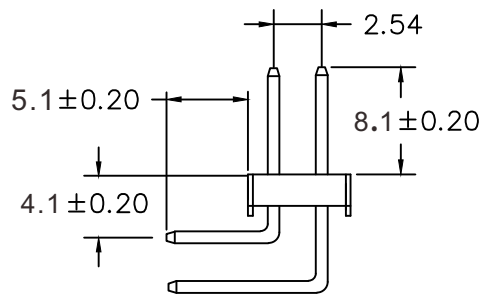

RECOMMENDED P.C.B LAYOUT

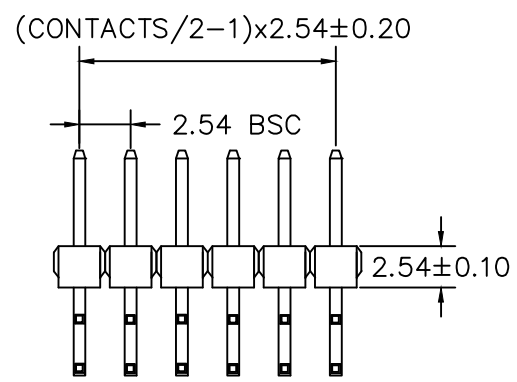

| | |
|----------|------|
| CONTACTS | 2X21 |
| 2X2 | 2X22 |
| 2X3 | 2X23 |
| 2X4 | 2X24 |
| 2X5 | 2X25 |
| 2X6 | 2X26 |
| 2X7 | 2X27 |
| 2X8 | 2X28 |
| 2X9 | 2X29 |
| 2X10 | 2X30 |
| 2X11 | 2X31 |
| 2X12 | 2X32 |
| 2X13 | 2X33 |
| 2X14 | 2X34 |
| 2X15 | 2X35 |
| 2X16 | 2X36 |
| 2X17 | 2X37 |
| 2X18 | 2X38 |
| 2X19 | 2X39 |
| 2X20 | 2X40 |

H-R814151-2Xxx-LF
 LEADFREE
 RoHS Compliant



煜倫股份有限公司

| | | | | | | | |
|-------------------------|-----------|---------------|--|---------------|----|------|--|
| PART NO. H-R814151-2Xxx | | CHECKED BY CY | TOLERANCES ARE .X ± .XX ± .XXX ± AWG | DESCRIP TION: | | | |
| DWG NO. H-R814151-2Xxx | | | | | | | |
| FILE NO. | | PROJECTION | AREA | REVISIONS | HK | DATE | |
| UNIT / mm | SCALE 1:1 | | | | | | |