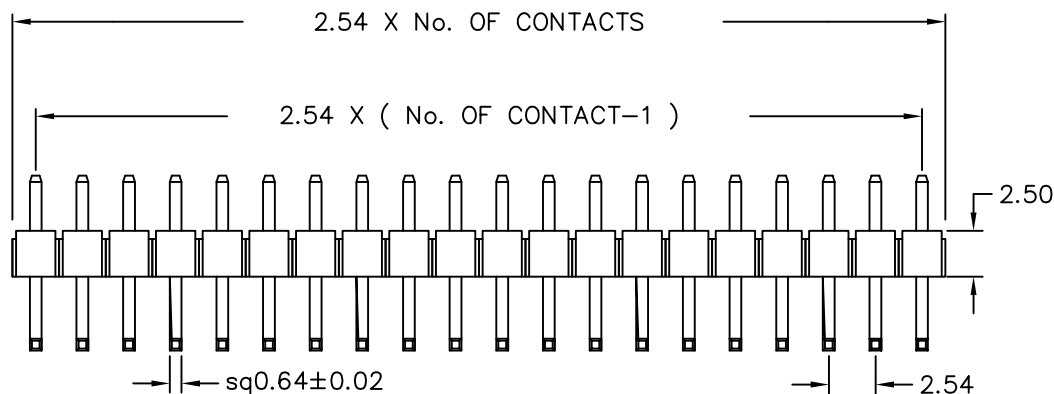
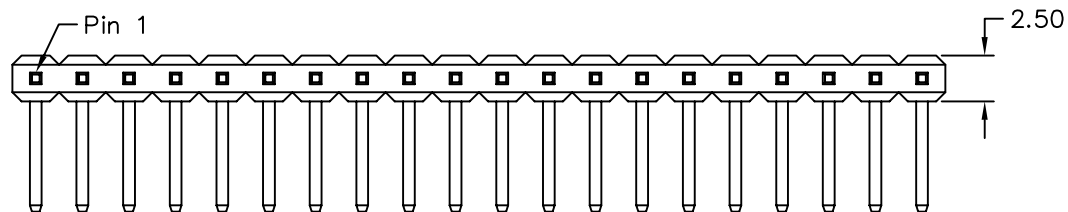


Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

H-RH2514110030-1Xxx-LF
SERIES HIGH BASE 2.5mm R/A 1.4mm
DIP 90°
CONTACT 11.0mm
DIP 3.0mm
LEADFREE
1X02:02WAY
1X40:40WAY

DESCRIPTION: PIN HEADER 2.54*2.54mm
RIGHT ANGLE TYPE, SINGLE ROW OPPOSITE INSULATOR