

MATERIAL

Contact Pin : Brass

SPECIFICATION



Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

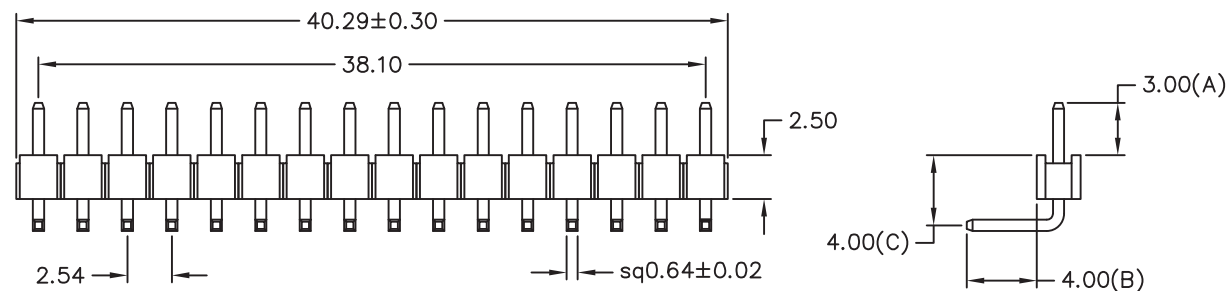

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H-RH2515040030-1X16-LF
SERIES | DIP 90° HIGH | R/A 1.5mm | CONTACT 4.0mm | 16 WAY | LEADFREE
BASE 2.54mm

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com