
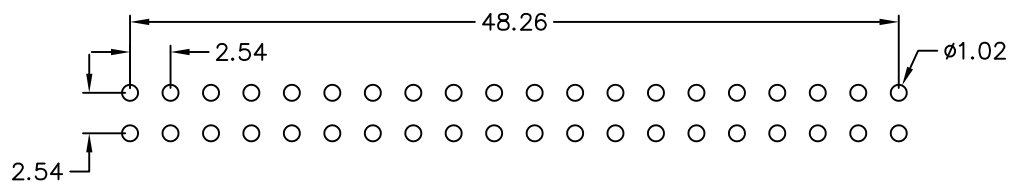
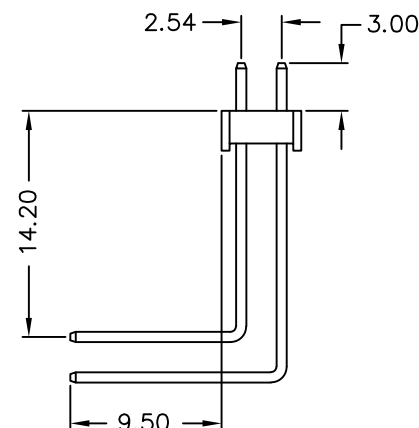


MATERIAL

Insulator : 30% Glass fiber PBT UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

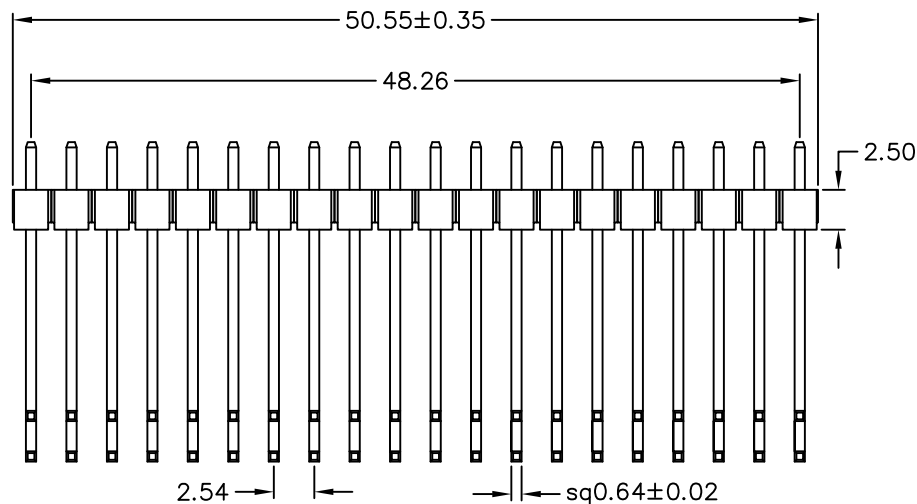

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

H-RL25117030095-2X20-LF
SERIES | DIP 90° | CONTACT 3.0mm | R/A 11.7mm | BASE 2.5mm | 40 WAY | LEADFREE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, DUAL ROWS