


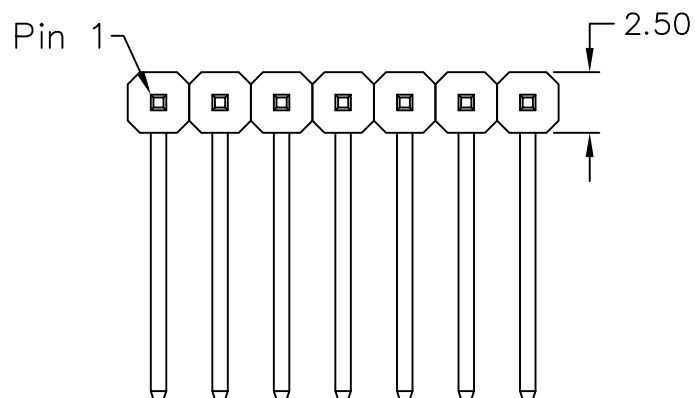

MATERIAL

Contact Pin : Brass




SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

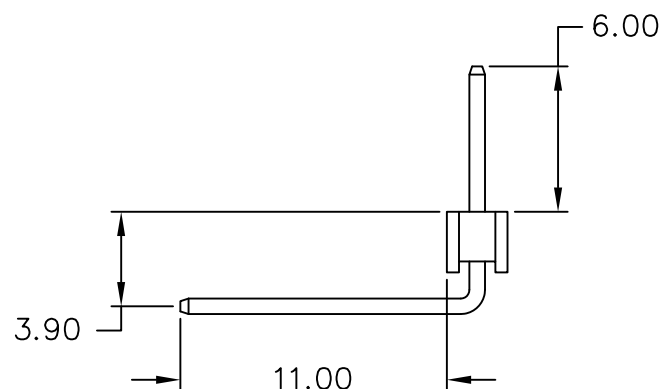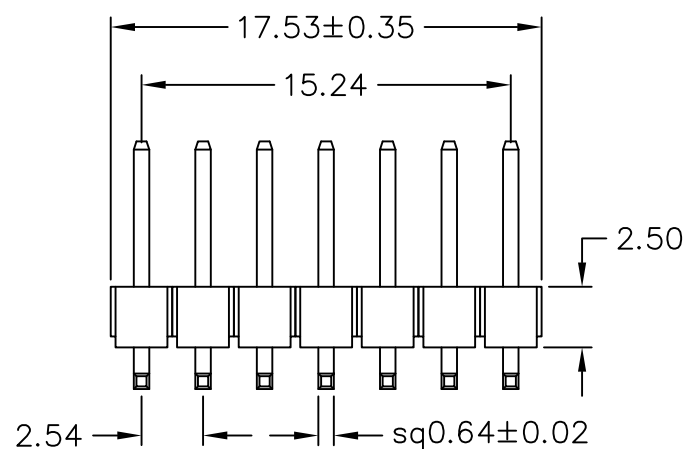

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 3°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

H-RL2514060110-1X07-LF
SERIES
DIP 90°
LOW
CONTACT 6.0mm
R/A 1.4mm
BASE 2.5mm
07 WAY
LEADFREE

DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, SINGLE ROW

煜倫股份有限公司

www.morethanall.com