

Recommended P.C.B Layout

MATERIAL

Insulator : PBT UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000mΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -25°C to + 85°C

POLES	DIM D	DIM E	POLES	DIM D	DIM E
			21	50.80	53.09
2	2.54	4.83	22	53.34	55.63
3	5.08	7.37	23	55.88	58.17
4	7.62	9.91	24	58.42	60.71
5	10.16	12.45	25	60.96	63.25
6	12.70	14.99	26	63.50	65.79
7	15.24	17.53	27	66.04	68.33
8	17.78	20.07	28	68.58	70.87
9	20.32	22.61	29	71.12	73.41
10	22.86	25.15	30	73.66	75.95
11	25.40	27.69	31	76.20	78.49
12	27.94	30.23	32	78.74	81.03
13	30.48	32.77	33	81.28	83.57
14	33.02	35.31	34	83.82	86.11
15	35.56	37.85	35	86.36	88.65
16	38.10	40.39	36	88.90	91.19
17	40.64	42.93	37	91.44	93.73
18	43.18	45.47	38	93.98	96.27
19	45.72	48.01	39	96.52	98.81
20	48.26	50.55	40	99.06	101.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

P PROJECTION

照片框

ORDER INFORMATION

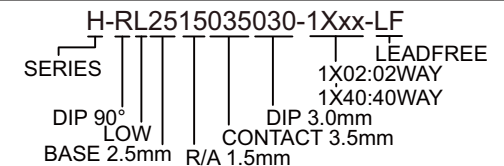

DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, SINGLE ROW

煜倫股份有限公司

www.morethanall.com