

Recommended P.C.B Layout

MATERIAL

Insulator: PBT UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

POLES	DIM D	DIM E	POLES	DIM D	DIM E
2	2.54	4.83	21	50.80	53.09
3	5.08	7.37	22	53.34	55.63
4	7.62	9.91	23	55.88	58.17
5	10.16	12.45	24	58.42	60.71
6	12.70	14.99	25	60.96	63.25
7	15.24	17.53	26	63.50	65.79
8	17.78	20.07	27	66.04	68.33
9	20.32	22.61	28	68.58	70.87
10	22.86	25.15	29	71.12	73.41
11	25.40	27.69	30	73.66	75.95
12	27.94	30.23	31	76.20	78.49
13	30.48	32.77	32	78.74	81.03
14	33.02	35.31	33	81.28	83.57
15	35.56	37.85	34	83.82	86.11
16	38.10	40.39	35	86.36	88.65
17	40.64	42.93	36	88.90	91.19
18	43.18	45.47	37	91.44	93.73
19	45.72	48.01	38	93.98	96.27
20	48.26	50.55	39	96.52	98.81
			40	99.06	101.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

P PROJECTION

照片框

ORDER INFORMATION

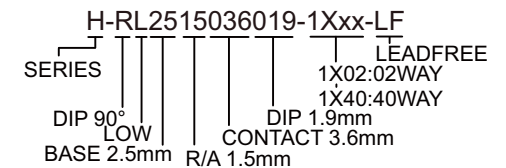

DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, SINGLE ROW BAG