
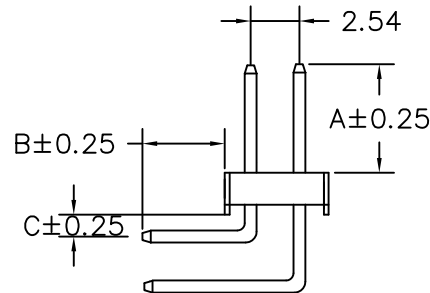


RECOMMENDED P.C.B LAYOUT

MATERIAL
 HOUSING : PBT, UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD FLASH
 COLOR : BLACK

SPECIFICATION
 CURRENT : 3A
 OPERATING TEMPERAURE : -55° C TO +105° C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 1000 V AC/minute

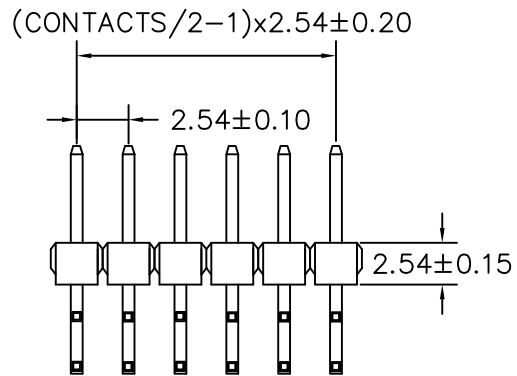

A: 3.90 mm B: 6.00 mm C: 1.50 mm

CONTACTS	2X21
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1:1

.XX ± 0.25

DATE

.XXX ±

ANG ± 5°

照片框

ORDER INFORMATION

H-RL2515039060-2Xxx-LF
 SERIES | LEADFREE
 DIP 90° | 2X02:04WAY
 LOW | 2X40:80WAY
 BASE 2.54mm | DIP 6.0mm
 RA 1.5mm | CONTACT 3.9mm

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: