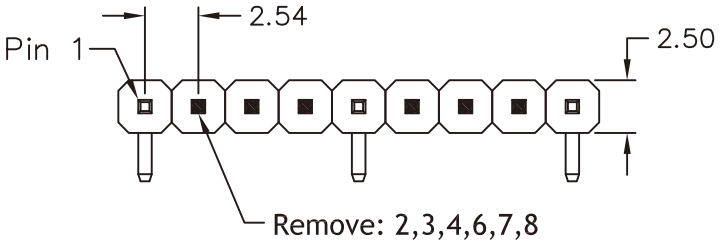


MATERIAL

Insulator : NY6T

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M MinΩat DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

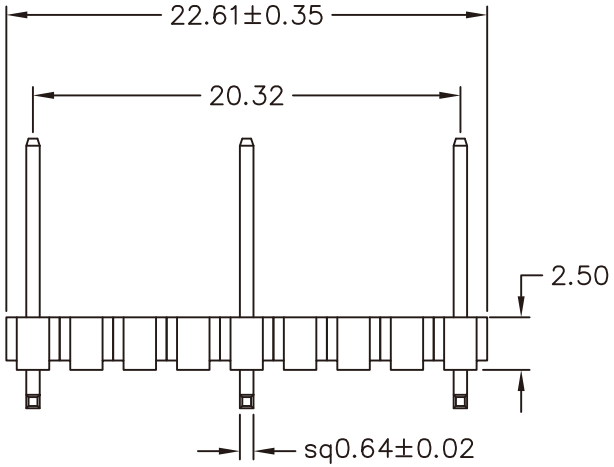


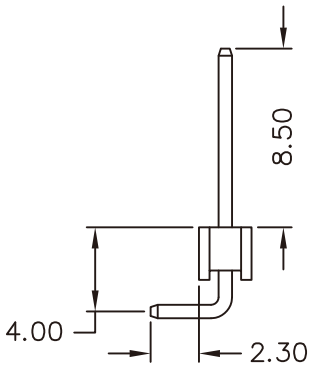


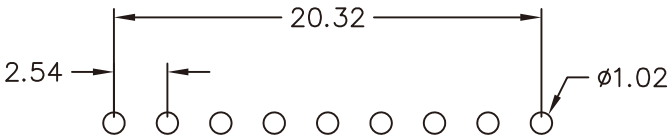


Recommended P.C.B Layout

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

| | | |
|---|---|---|
| DRAWING BY CY | | TOLERANCES ARE |
| CHECKED BY GENIUS | | X. ± |
| UNIT / mm | SCALE 1 : 1 | .X ± 0.30 |
| | | .XX ± 0.20 |
| DATE | | .XXX ± |
| | | ANG ± 3° |
| SIZE A4 | PPOJECTION | |

照片框

ORDER INFORMATION

H-RL2515085023EM3-1X03-LF

SERIES

DIP 90°

LOW BASE 2.5mm

R/A 1.5mm

CONTACT 8.5mm

DIP 2.3mm

EMPTY 2.3.4.6.7.8 PIN

03 WAY

LEADFREE

DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, SINGLE ROW