




**MATERIAL**  
Contact Pin : Brass

**SPECIFICATION**  
Current Rate : 3 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 20mΩMax. at DC 100mA  
Dielectric Voltage : AC 500V for one minute

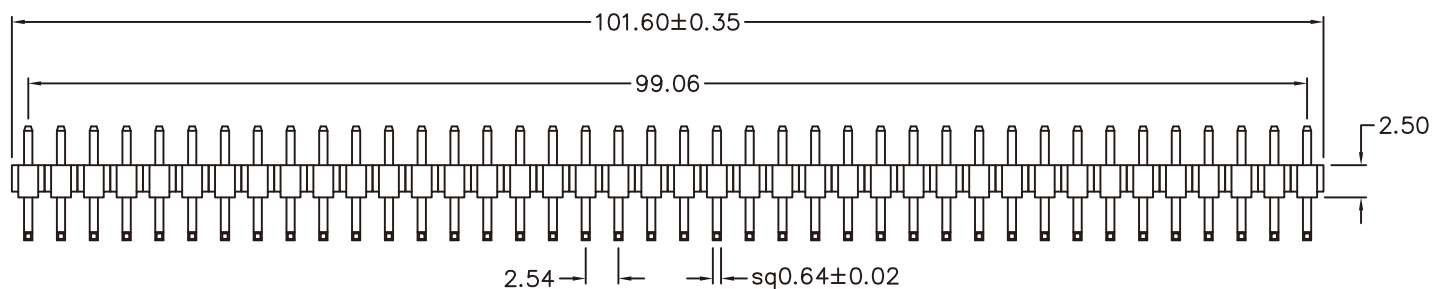

Recommended P.C.B Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 3°

照片框

**ORDER INFORMATION**

H-RL2530030030-1X40-LF  
SERIES | LEADFREE  
DIP 90° | 40 WAY  
LOW | CONTACT 3.0mm  
R/A 3.0mm |  
BASE 2.5mm

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: PIN HEADER 2.54\*2.54mm RIGHT ANGLE TYPE, SINGLE ROW