
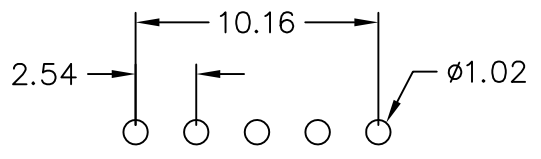
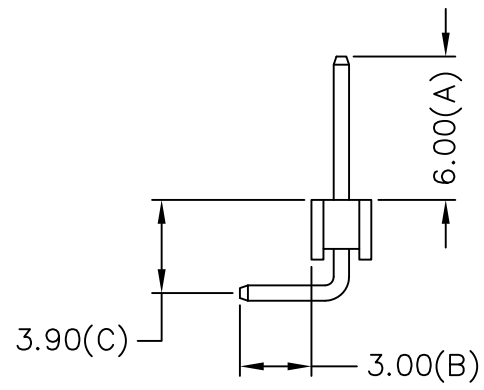


MATERIAL
Contact Pin : Brass

SPECIFICATION
Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

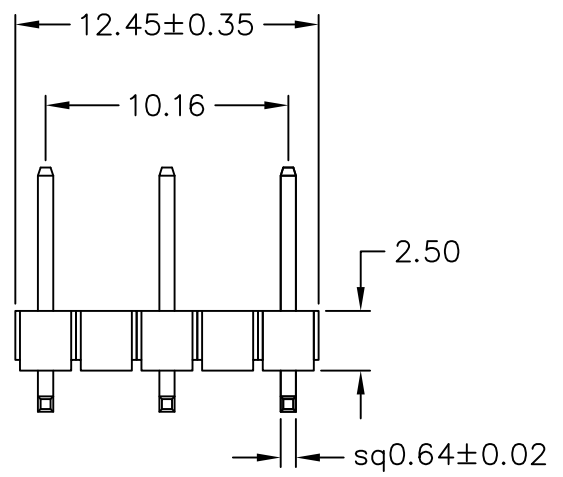

Recommended P.C.B Layout

H-RLT-1X05EE-LF
LEADFREE
T:MATTE TIN PLATED
RoHS Compliant

	PART NO. H-RLT-1X05EE		TOLERANCES ARE X. ± .X ± .30 .XX ± .20 .XXX ± ANG	DESCRIPTION:	PIN HEADER 2.54*2.54mm		
	DWG NO. H-RLT-1X05EE				CHECKED BY CY	RIGHT ANGLE TYPE, SINGLE ROW	
	FILE NO.		DRAWING BY	AREA	REVISIONS	DATE	
	UNIT / mm	SCALE 1:1	PROJECTION				