


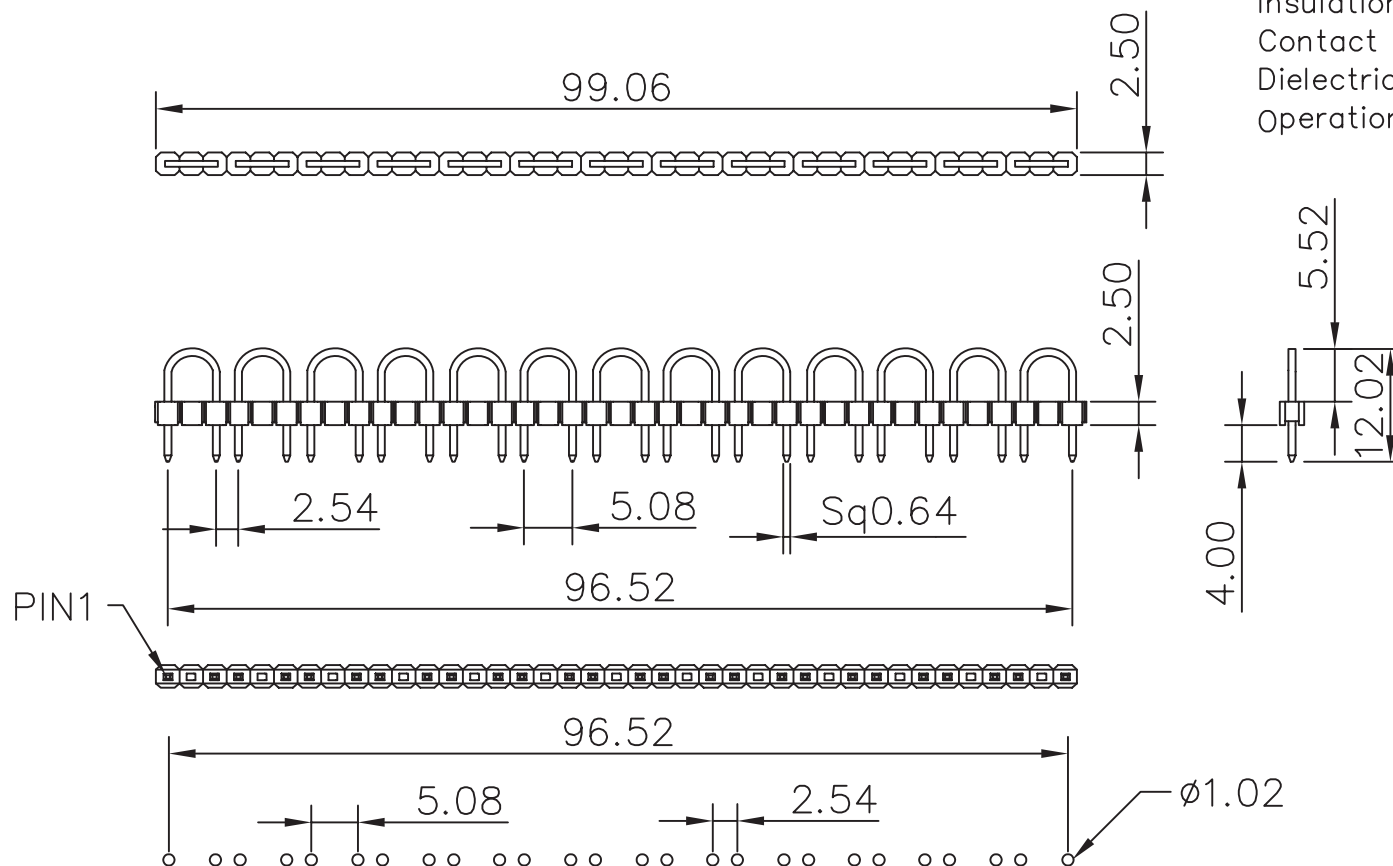

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant		TOLERANCES ARE	
 煜倫股份有限公司 www.morethanall.com	DRAWING BY CY	X. $\pm$	
	CHECKED BY GENIUS	.X $\pm$	
	UNIT / mm	.XX $\pm$	
	SCALE 1 : 1	.XXX $\pm$	
	DATE	ANG $\pm$	
SIZE A4	PPOJECTION		

照片框

ORDER INFORMATION

H-U-1X13-LF
 SERIES | LEADFREE
 13 PCS
 U TYPE

DESCRIPTION: