


P.C.B. LAYOUT

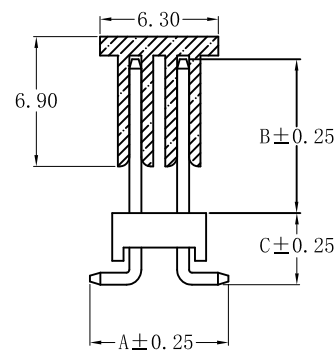

A: 7.50 mm;

B: 10.60 mm;

C: 3.30 mm

MATERIAL

HOUSING : NY6T, UL-94V0
 CAP : NY6T, UL-94V0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD FLASH
 COLOR : BLACK

SPECIFICATION

CURRENT : 3A
 OPERATING TEMPERAURE : -55° C TO +105° C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 1000 V AC/Minite

CONTACTS			
	2×11	2×21	2×31
2×02	2×12	2×22	2×32
2×03	2×13	2×23	2×33
2×04	2×14	2×24	2×34
2×05	2×15	2×25	2×35
2×06	2×16	2×26	2×36
2×07	2×17	2×27	2×37
2×08	2×18	2×28	2×38
2×09	2×19	2×29	2×39
2×10	2×20	2×30	2×40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

P PROJECTION

照片框

ORDER INFORMATION

H-V33X106C-2Xxx-LF
 SERIES | | | | | LEADFREE
 | | | | | 2X02:04 WAY
 | | | | | 2X40:80 WAY
 180°SMT | | | | | CAP
 HIGH 3.3mm | | | | | CONTACT 10.6mm
 | | | | | POST

DESCRIPTION: PIN HEADER 2.54PH SMT+CAP H:2.54 2*XXPIN