

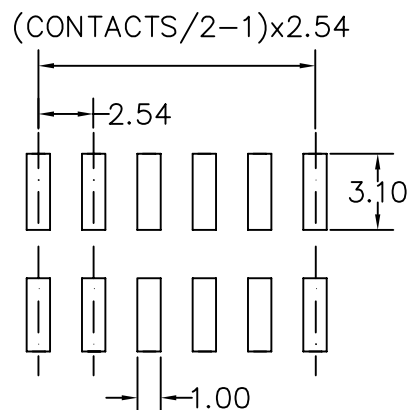
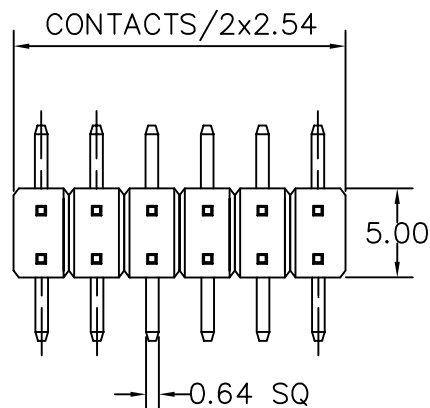




RECOMMENDED P.C.B LAYOUT

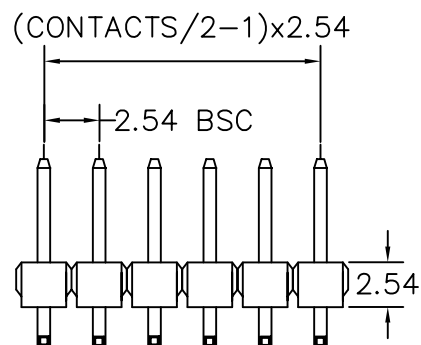

A: 7.40 mm B: 3.00 mm C: 3.30 mm

MATERIAL
HOUSING : NYLON 6T,UL94V-0
REFLOW TEMPERATURE OF 260 DEGREES
C FOR 5 SECONDS
CONTACT : COPPER ALLOYS

SPECIFICATION
CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : AC 1000V RMS

CONTACTS	2X21
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

H-V33X30-2Xxx-LF
SERIES
180°SMT
LEADFREE
2X02:04 WAY
2X40:80 WAY
CONTACT 3.0mm
NON POST
HIGH 3.3mm

DESCRIPTION: