
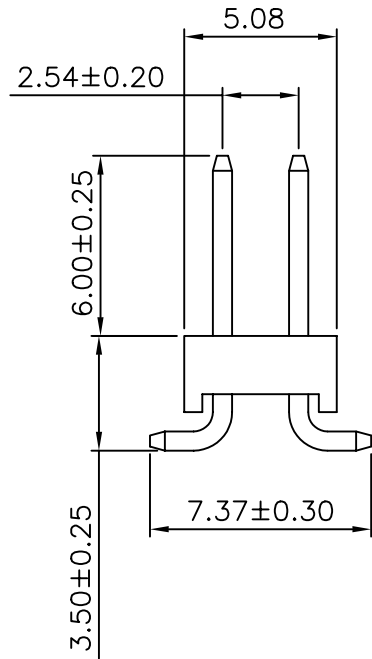
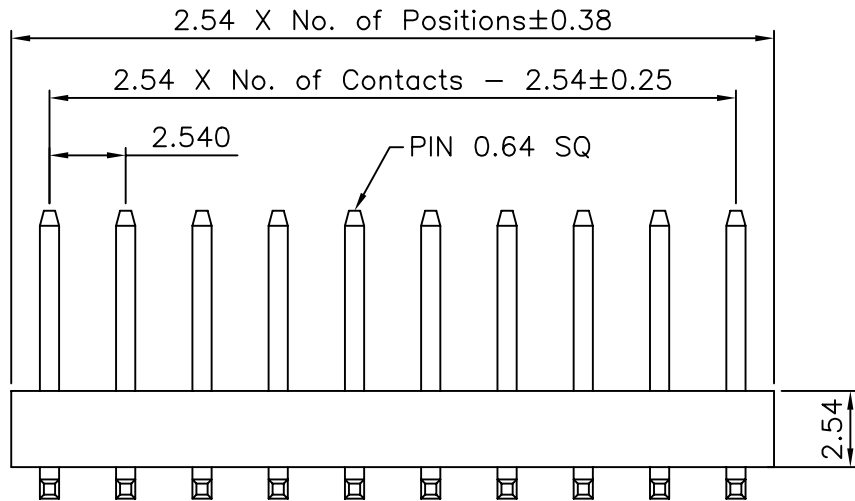


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

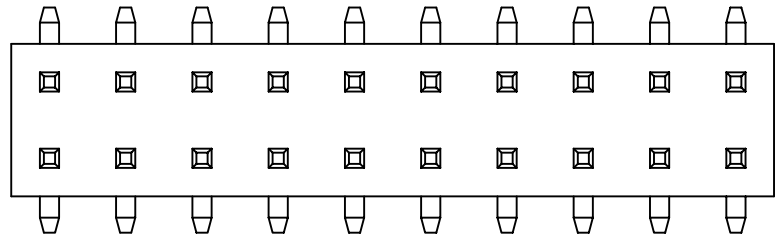


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper alloy
 Insulator Material: Polyester, UL94V-0
 NYLON-6T

Recommended P.C.Board Layout

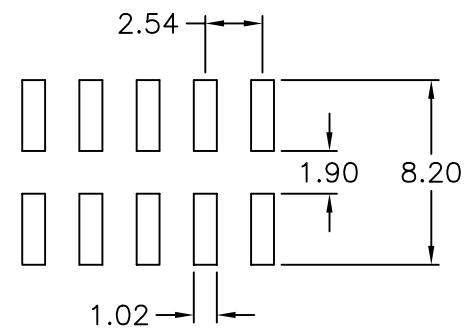

煜倫有限公司

PART NO. H-V35-2Xxx

DWG NO. H-V35-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X ± 0.38
 XX ± 0.25
 XXX ± 0.13
 AWG

DESCRIPTION: 254 PIN HEADER DUAL ROW SMT TYPE BASE 2.54

AREA	REVISIONS	HK	DATE