

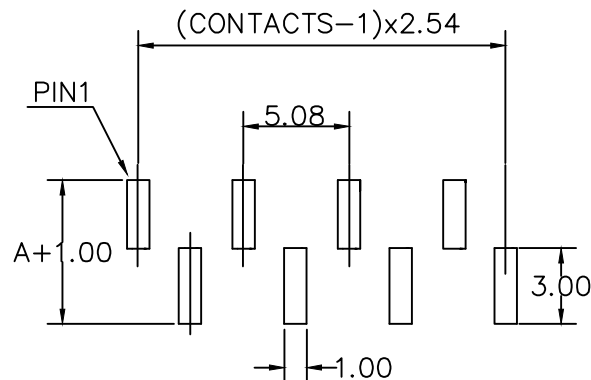
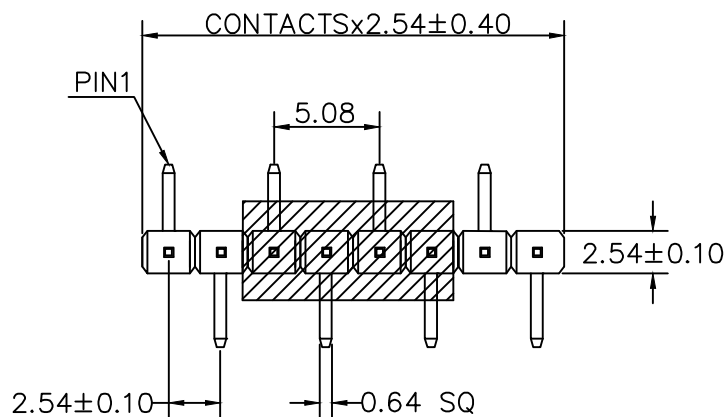




RECOMMENDED P.C.B LAYOUT

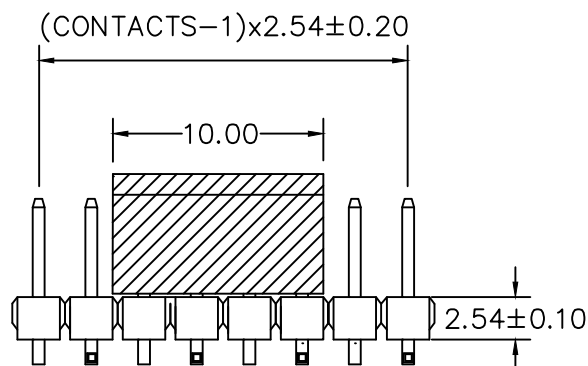

A: 5.00 mm B: 10.60 mm C: 3.80 mm

CONTACTS	
1X2	1X21
1X3	1X22
1X4	1X23
1X5	1X24
1X6	1X25
1X7	1X26
1X8	1X27
1X9	1X28
1X10	1X29
1X11	1X30
1X12	1X31
1X13	1X32
1X14	1X33
1X15	1X34
1X16	1X35
1X17	1X36
1X18	1X37
1X19	1X38
1X20	1X39
	1X40

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55℃ TO +105℃

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE: AC 1000V RMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

照片框

ORDER INFORMATION

H-V38X106C-1XxxR-LF
SERIES | 180°SMT | HIGH 3.8mm | NON POST | CAP | CONTACT 10.6mm
LEADFREE
R TYPE FOOT POSITION
1X02:02WAY
1X40:40WAY

DESCRIPTION: