



Recommended P.C.B Layout

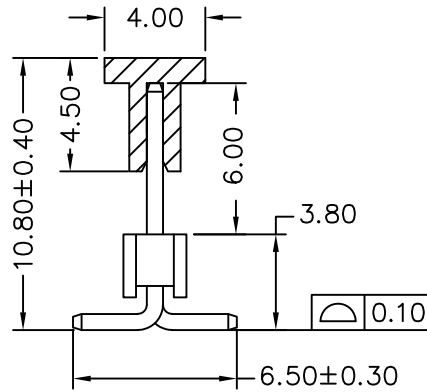


**MATERIAL**

Insulator : NY6T UL94-V0   
 Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute

 Operation Temperature: -40°C to +105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ±  
 ANG ± 3°

P PROJECTION 

照片框

**ORDER INFORMATION**

H-V38X60C-1X03L-LF  
 SERIES | | | | | LEADFREE  
 180°SMT | | | | | L TYPE FOOT POSITION  
 HIGH 3.8mm | | | | | 03 WAY  
 | | | | | CAP  
 | | | | | CONTACT 6.0mm  
 | | | | | NON POST

DESCRIPTION: PIN HEADER 2.54\*2.54mm SMT S/T TYPE, SINGLE ROW CAP