


Recommended P.C.B Layout

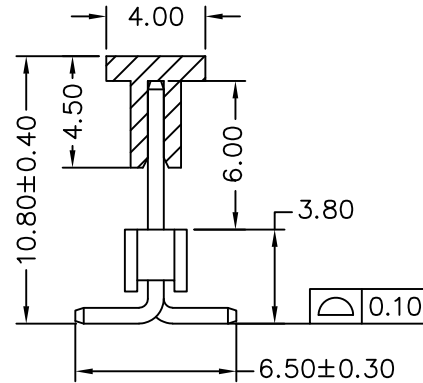

**MATERIAL**

Insulator : NY6T UL94-V0  $\triangle$

Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP

Insulation Resistance : 5000M $\Omega$ Min. at DC 500V

Contact Resistance : 20m $\Omega$ Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

$\triangle$  Operation Temperature: -40°C to +105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
**煜倫股份有限公司**  
www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

PJECTION

照片框

**ORDER INFORMATION**

H-V38X60CR-1X03L-LF  
SERIES | | | | | LEADFREE  
180°SMT | | | | | L TYPE FOOT POSITION  
HIGH 3.8mm | | | | | REEL  
NON POST | | | | | CAP  
CONTACT 6.0mm

DESCRIPTION: PIN HEADER 2.54\*2.54mm SMT S/T TYPE, SINGLE ROW CAP+T/R

