

Recommended P.C.B Layout

MATERIAL

Insulator : NY9T
 Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PROJECTION

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

照片框

ORDER INFORMATION

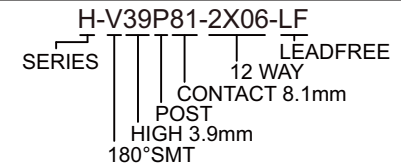

DESCRIPTION: PIN HEADER 2.54*2.54mm SMT S/T TYPE, DUAL ROWS