


H-VxxXCR-1XxxR-LF
 CAP REEL LEADFREE
 35:3.50mm
 38:3.80mm

RoHS Compliant

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL94V-0
 Nylon 6T

Recommended P.C.Board
 Layout

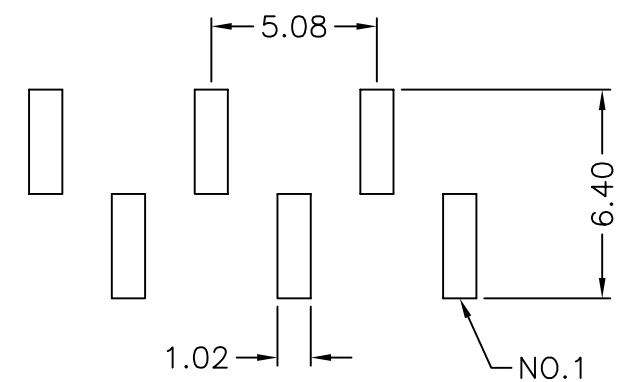

PART NO. H-VxxXCR-1XxxR	
DWG NO. H-VxxXCR-1XxxR	
FILE NO.	
UNIT / mm	SCALE 1:1

APPROVED BY CY	DRAWING BY
PROJECTION	

TOLERANCES ARE
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
AWG

DESCRIPTION:	2.54 PIN HEADER SINGLE ROW SMT TYPE BASE 2.54H			
AREA	REVISIONS	HK	DATE	

煜倫股份有限公司