

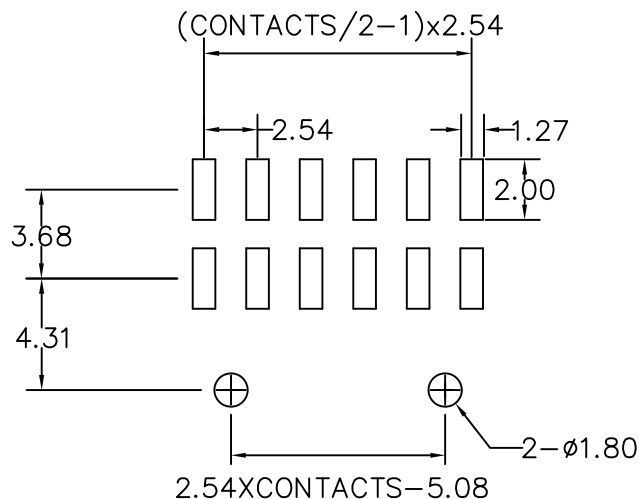


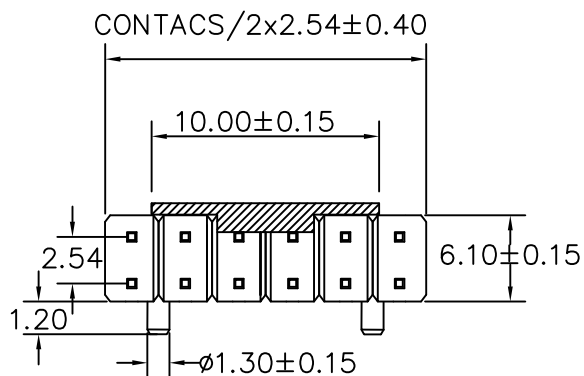


MATERIAL
 HOUSING : NY6T,UL94V-0
 CAP : NY6T,UL94V-0
 ONTACT : COPPER ALLOYS
 PLATED : GOLD-FLASH
 COLOR : BLACK

SPECIFICATION
 CURRENT : 3A
 OPERATING TEMPAURE : -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 500 V AC MIN

(CONTACTS/2-1)x2.54±0.20

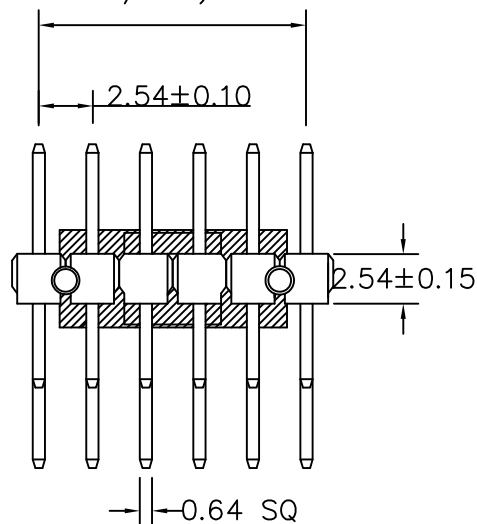

RECOMMENDED P.C.B LAYOUT

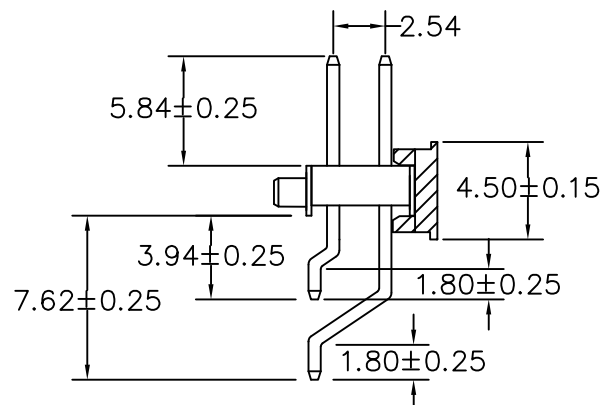

CONTACTS	
2X3	2X22
2X4	2X23
2X5	2X24
2X6	2X25
2X7	2X26
2X8	2X27
2X9	2X28
2X10	2X29
2X11	2X30
2X12	2X31
2X13	2X32
2X14	2X33
2X15	2X34
2X16	2X35
2X17	2X36
2X18	2X37
2X19	2X38
2X20	2X39
2X21	2X40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

H-WPC-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 CAP
 POST
 90°SMT

DESCRIPTION: PIN HEADER 2.54