
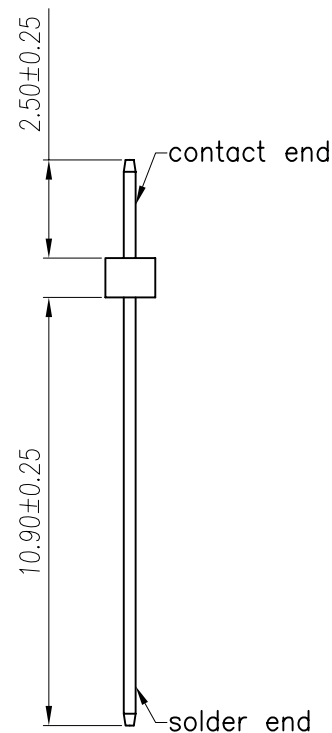


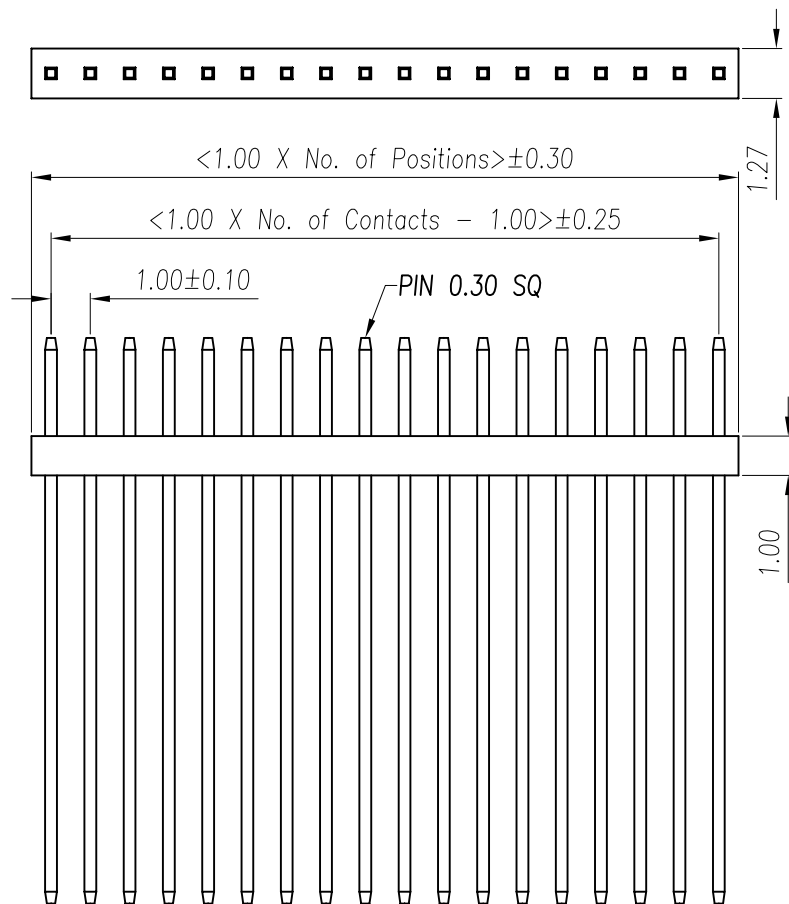

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding: 300V AC.

Contact Resistance: 20mΩMax.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

LCP or equivalent material

Recommended P.C.Board Hole Layout



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H10-D10025109-1Xxx-LF
SERIES | DIP180° | BASE 1.0mm | CONTACT 2.5mm | LEADFREE | 1X02:02WAY | 1X50:50WAY

DESCRIPTION: 1.00 PIN HEADER SINGLE ROW DIP TYPE