
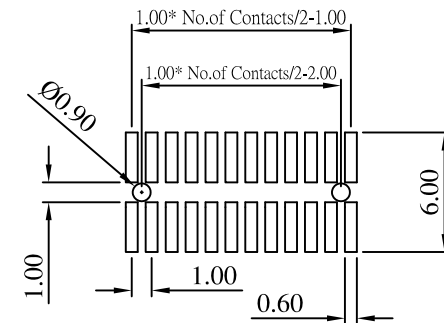
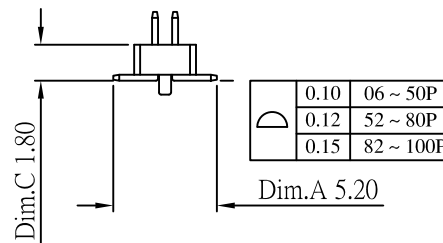


Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20m ohms max
 Dielectric Withstanding: 300 V AC
 Operating Temperature: - 40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Standard: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: LCP
 Finish: Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

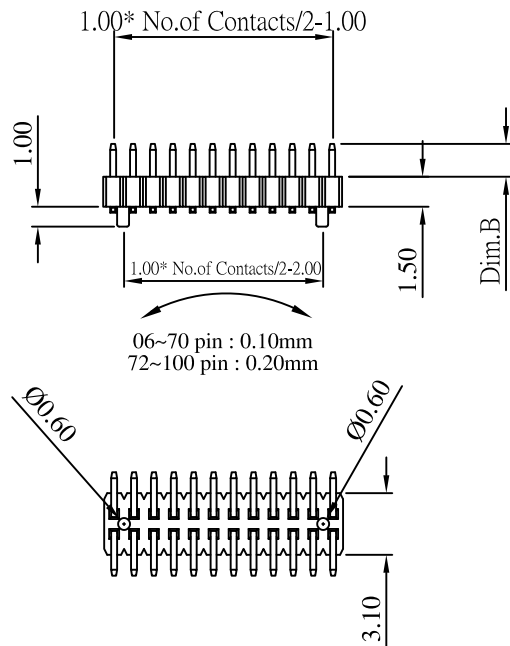

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H10-V18P16-2Xxx	5.20mm	1.65mm	1.80mm
H10-V18P19-2Xxx	5.20mm	1.90mm	1.80mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PJECTION

照片框

ORDER INFORMATION

H10-V18Pxx-2Xxx-LF
 SERIES | LEADFREE
 180°SMT | 2X03:06 WAY
 HIGH 1.8mm | 2X50:100 WAY
 | 16:CONTACT 1.65mm
 | 19:CONTACT 1.90mm
 POST

DESCRIPTION: