

Material:

Housing: High temperature housing withstands IR and VPR soldering methods.
Contacts: Brass.





Electrical Characteristics:

Current Rating: 1 AMP.
Insulator Resistance: 5000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

H10-V19P-2Xxx-LF
 LEADFREE

RoHS Compliant

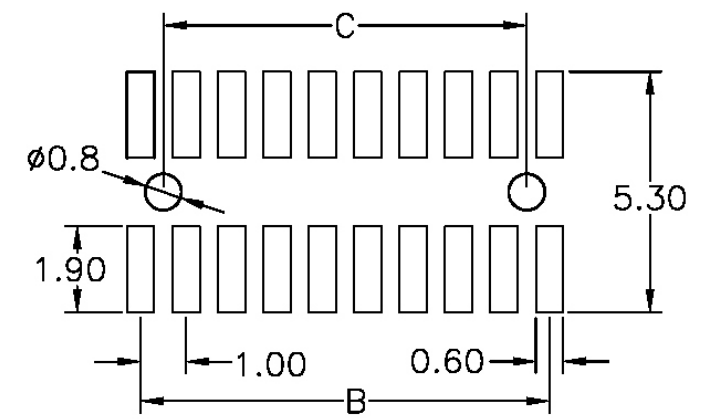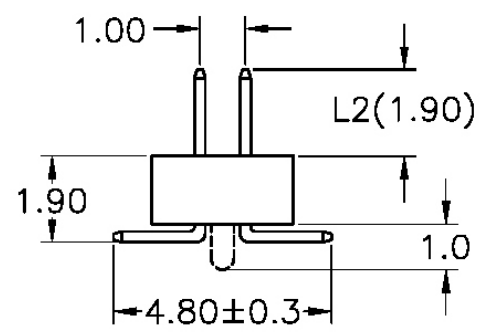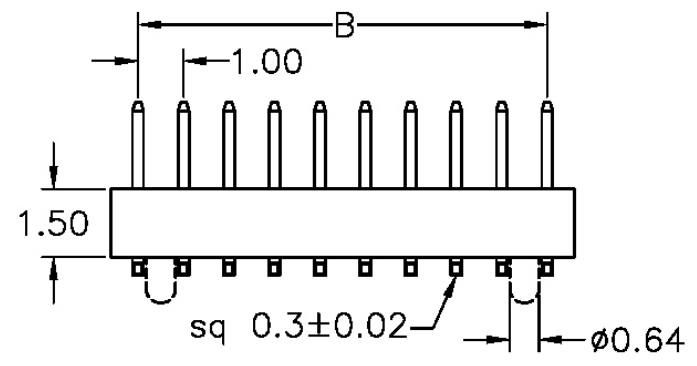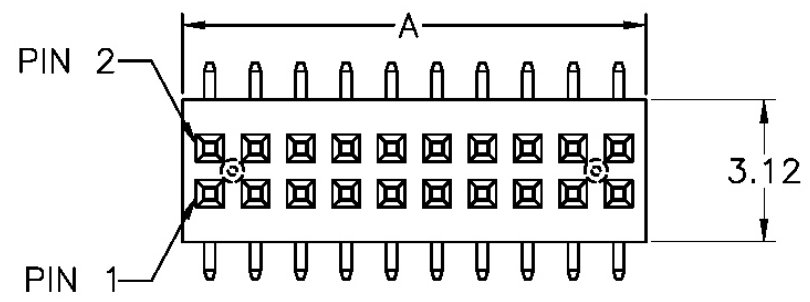

P.C. Board Layout



煜倫股份有限公司

PART NO. H10-V19P-2Xxx

DWG NO. H10-V19P-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE