

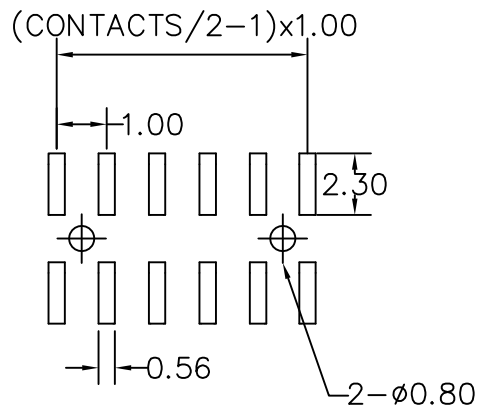
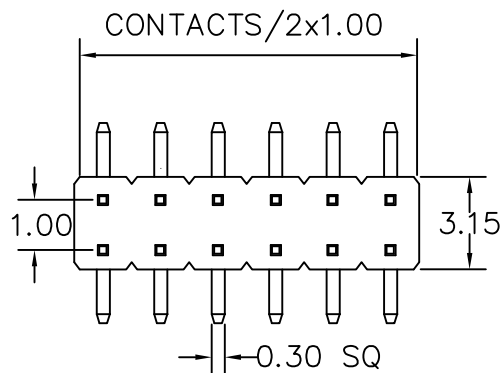




| CONTACTS | 2X16 |
|----------|------|
| 2X2      | 2X17 |
| 2X3      | 2X18 |
| 2X4      | 2X19 |
| 2X5      | 2X20 |
| 2X6      | 2X21 |
| 2X7      | 2X22 |
| 2X8      | 2X23 |
| 2X9      | 2X24 |
| 2X10     | 2X25 |
| 2X11     | 2X26 |
| 2X12     | 2X27 |
| 2X13     | 2X28 |
| 2X14     | 2X29 |
| 2X15     | 2X30 |

### RECOMMENDED P.C.B LAYOUT

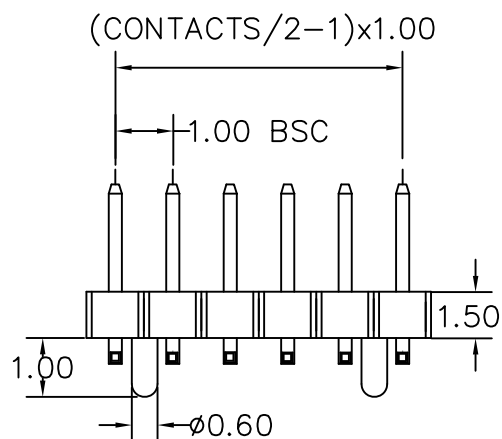

A: 5.20 mm B: 1.90 mm C: 1.90 mm

### MATERIAL

HOUSING : THERMOPLASTIC UL94V-0  
CONTACT : COPPER ALLOYS

### SPECIFICATION

CURRENT: 1A  
OPERATING TEMPERATURE: -40°C TO +105°C  
CONTACT RESISTANCE : 20 MILLIOHMS MAX  
INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
WITHSTANDING VOLTAGE : AC 500V RMS

### RoHS Compliant

### TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG ± 5°

PPOJECTION

照片框

### ORDER INFORMATION

H10-V19P19-2Xxx-LF  
SERIES  
180°SMT  
HIGH 1.9mm  
LEADFREE  
2X02:04WAY  
2X30:60WAY  
CONTACT 1.9mm  
POST

DESCRIPTION: