
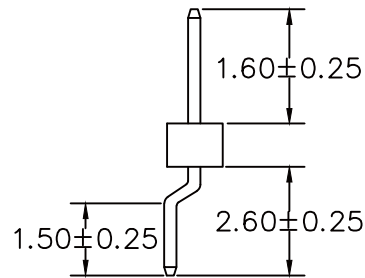


**MATERIAL**  
 HOUSING : THERMOPLASTIC UL94V-0  
 CONTACT : COPPER ALLOYS

**SPECIFICATION**  
 CURRENT: 1A  
 OPERATING TEMPERATURE: -40°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : AC 500V RMS

RECOMMENDED P.C.B LAYOUT

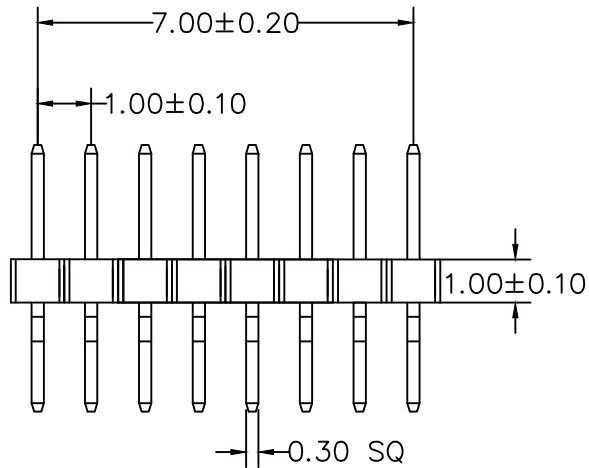

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1:1  
 DATE

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±

照片框

ORDER INFORMATION

H10-WX16-1X08-LF  
 SERIES | LEAD FREE  
 | 8 WAY  
 | CONTACT 1.6mm  
 | NON POST  
 | 90°SMT

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: