


No. of Contacts	DIMENSIONS	
	A	B
10	4.00	6.65
12	5.00	7.65
14	6.00	8.65
16	7.00	9.65
18	8.00	10.65
20	9.00	11.65
22	10.00	12.65
24	11.00	13.65
26	12.00	14.65
28	13.00	15.65
30	14.00	16.65
32	15.00	17.65
34	16.00	18.65
36	17.00	19.65
38	18.00	20.65
40	19.00	21.65
42	20.00	22.65
44	21.00	23.65
46	22.00	24.65
48	23.00	25.65
50	24.00	26.65
52	25.00	27.65
54	26.00	28.65
56	27.00	29.65
58	28.00	30.65
60	29.00	31.65
62	30.00	32.65
64	31.00	33.65

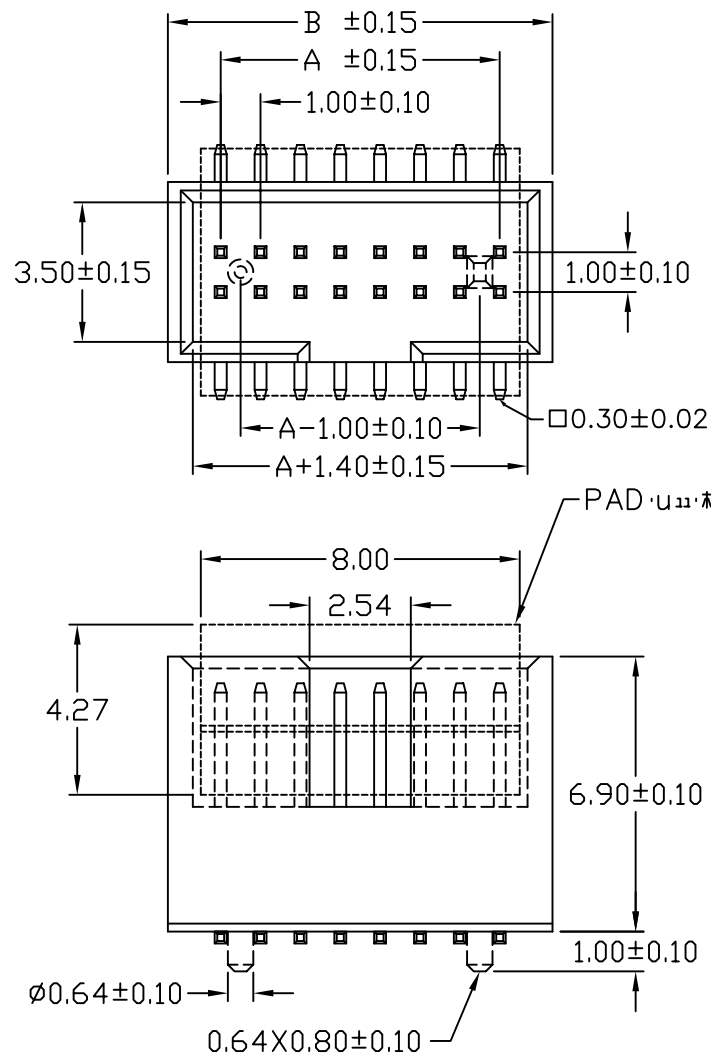


SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ} \sim +105^{\circ}C$
 Contact Material: Copper alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Color : Black

Finish: Tin, Gold plated
 ◎ Standard: Gold flash all over

Recommended PCB Layout (PCB TOLERANCE ± 0.05)

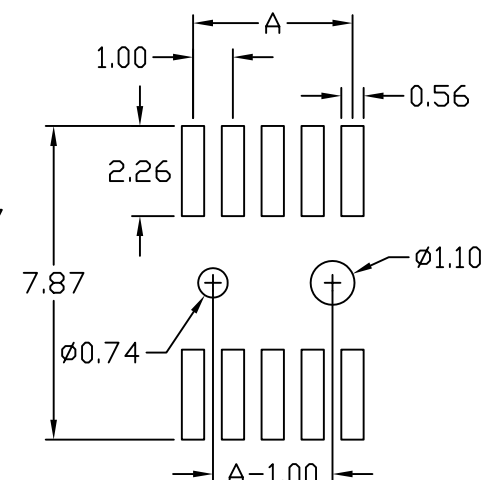

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

H10B-V34P31C-2Xxx-LF
 SERIES
 180°SMT
 HIGH 3.4mm
 CAP
 CONTACT 3.1mm
 POST
 LEADFREE
 2X05:10WAY
 2X32:64WAY

DESCRIPTION: 1.0*1.0mm BOX HEADER

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.25
 .XXX ± 0.20
 ANG ±