
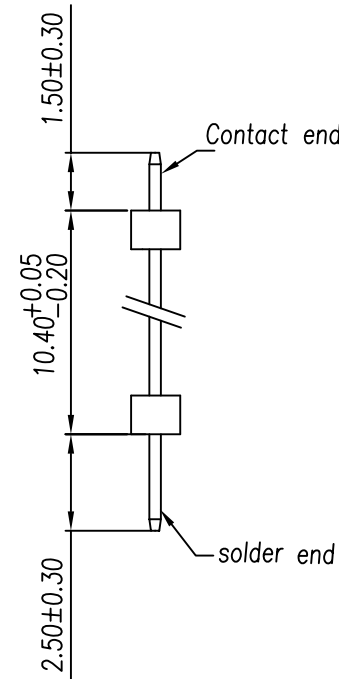
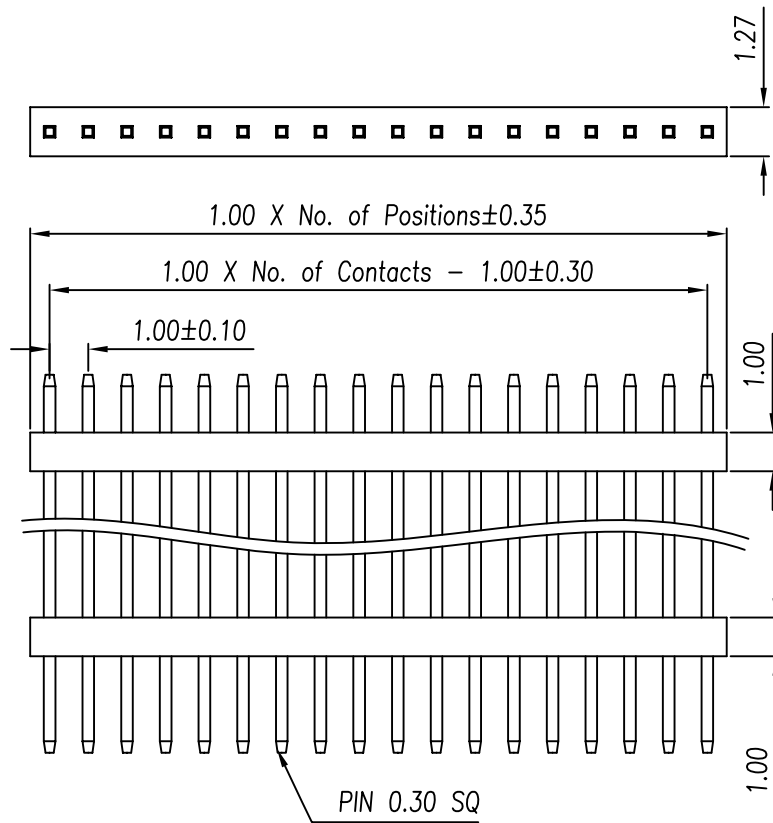


Specifications

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC .  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: phosphor bronze  
 Insulation Material: Polyester,  
 UL 94V-0 LCP or Equivalent material

H10S-D1441525-1Xxx-LF  
 02~40WAY LEADFREE  
 RoHS Compliant

Recommended P.C.Board  
 Hole Layout



	PART NO. H10S-D1441525-1Xxx		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 1.00 PIN HEADER SINGLE ROW DIP TYPE BASE 1.00H
	DWG NO. H10S-D1441525-1Xxx			
焯倫股份有限公司	FILE NO.		DRAWING BY	AREA    REVISIONS    HK    DATE
	UNIT / mm	SCALE 1:1	PROJECTION	