

MATERIAL

Insulator : NYLON 9T

Contact Pin : Brass

SPECIFICATION




Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

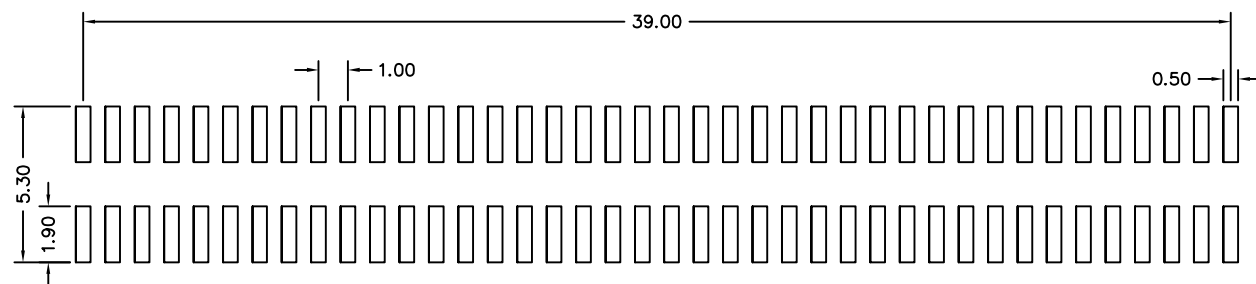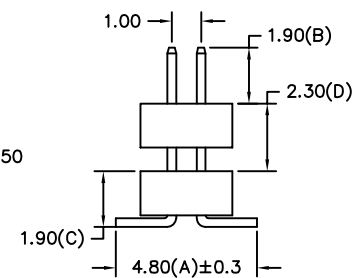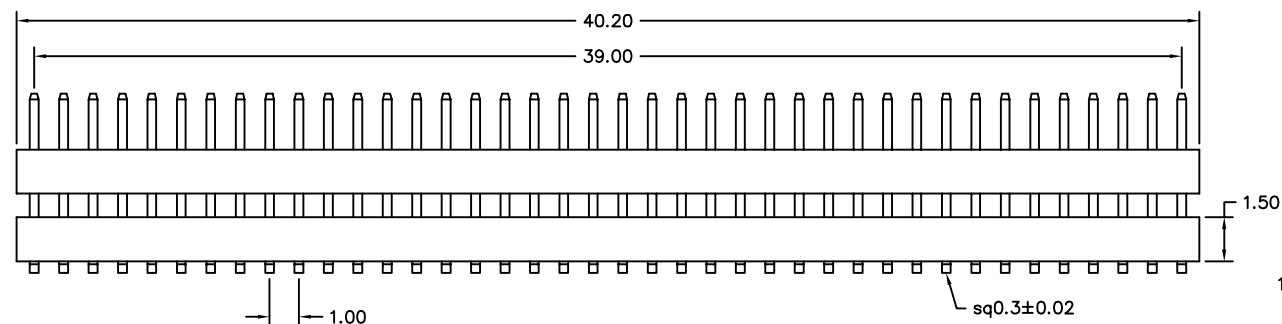

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H10S-V042X19-2X40-LF

SERIES LEADFREE
80 WAY
CONTACT 1.9mm
NON POST
HIGH 4.20mm
180°SMT

DESCRIPTION:PIN HEADER 1.0*1.0mm SMT S/T TYPE, DUAL ROWS HEIGHT=1.5mm