

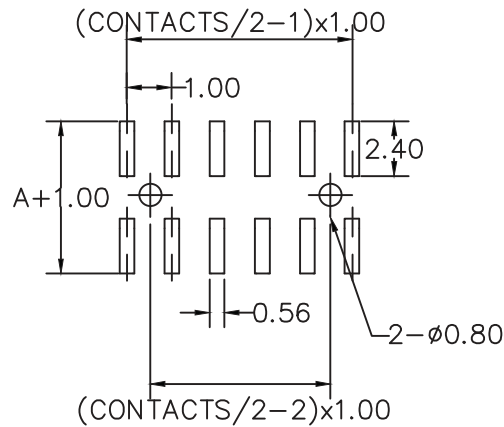
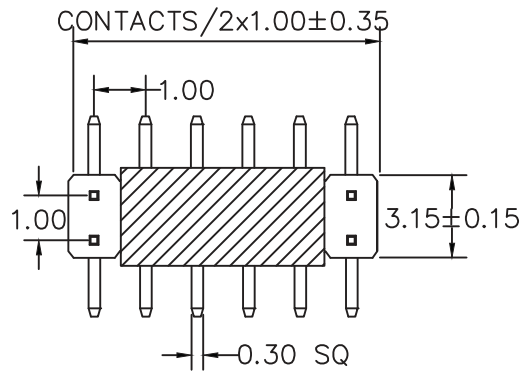


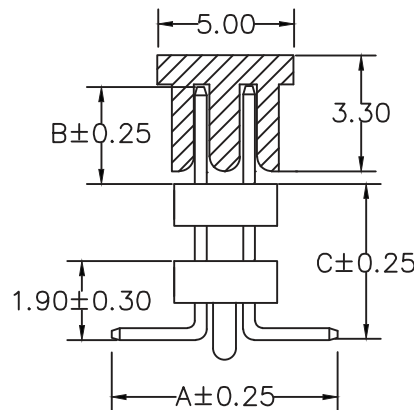

RECOMMENDED P.C.B LAYOUT

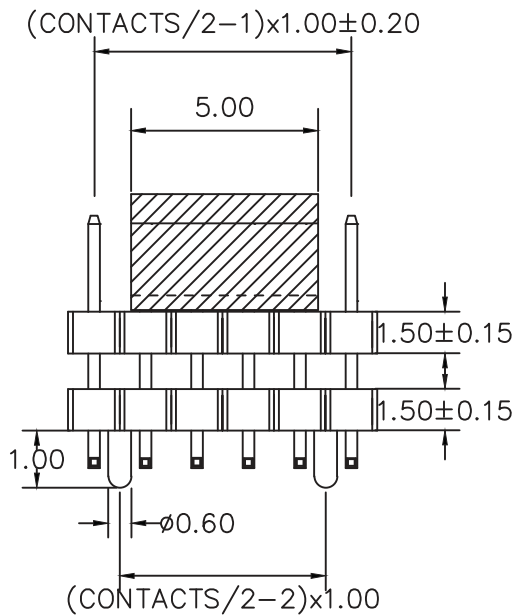

A: 5.20 mm B: 8.90 mm C: 5.10 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -40°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 500V RMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

H10S-V051P89C-2Xxx-LF

SERIES

LEADFREE

2X02:04 WAY

2X50:100 WAY

180°SMT

HIGH 5.10mm

CAP

CONTACT 8.9mm

POST

DESCRIPTION: PIN HEADER 1.0 SMT+POST+CAP