
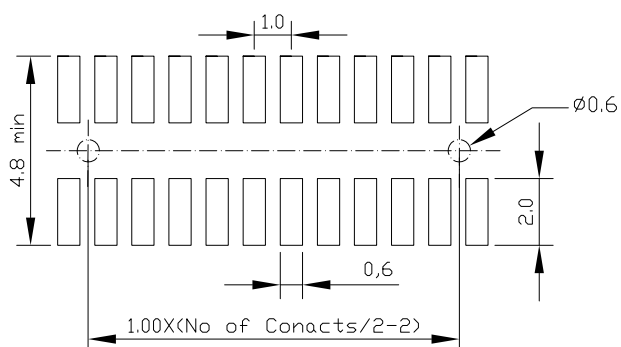
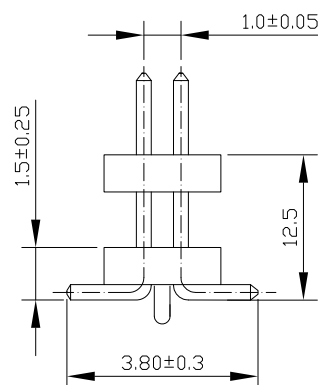
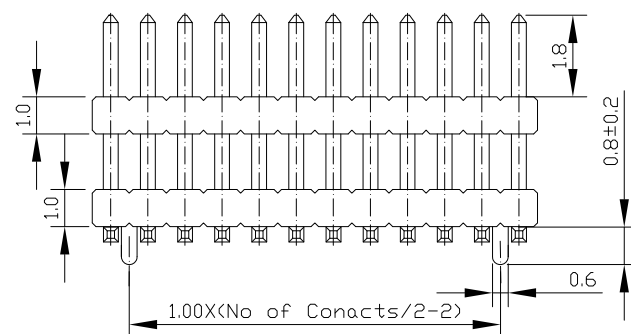


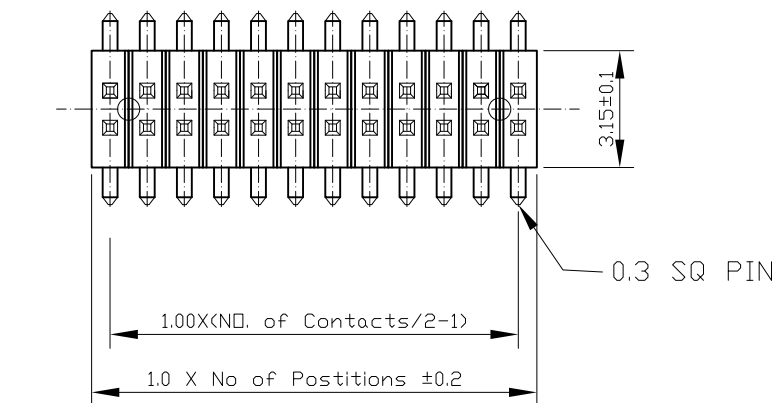

Specifications

Current Rating : 1 Amp

Insulator Resistance : 1000 Meghms min.

Contact Resistance : 20 m ohms min.

Dielectric Withstanding : AC 300V

Operating Temperature : -40°C ~ +105°C

Contact Material : Brass

Insulator Moterol : Polyester, UL 94V-0

Standard : L.C.P

Contact Plated : See Option / Standard:Full Gold

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

ORDER INFORMATION

H10S-V125P18-2Xxx-LF

SERIES

180°SMT

POST

HIGH 12.5mm

LEADFREE

2X02:04 WAY

2X50:100 WAY

CONTACT 1.8mm

DESCRIPTION: 1.0mm X 1.0mm PIN HEADER, DUAL ROW, STRAIGHT, SMT TYPE