
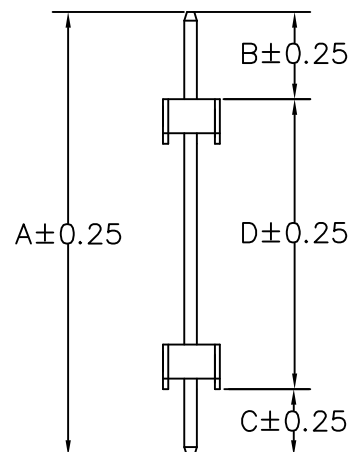


MATERIAL
 HOUSING : NY6T,UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : TIN
 COLOR : BLACK

RECOMMENDED P.C.B LAYOUT

SPECIFICATION

CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : 1000 V AC/minute

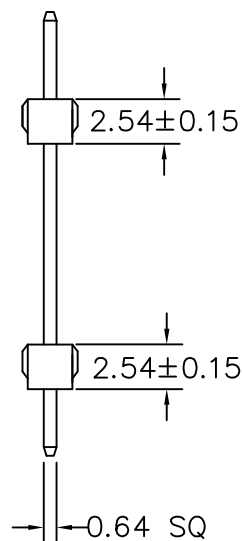

A: 12.70 mm B: 3.00 mm C: 3.00 mm D: 6.70 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

H25S-D1273030T-1X01-LF
 SERIES | | | | | LEADFREE
 | | | | | 01 WAY
 | | | | | TIN
 | | | | | DIP 3.0mm
 | | | | | CONTACT 3.0mm
 | | | | | TOTAL 12.7mm
 DIP180°

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com