

Recommended P.C.B.Layout

MATERIAL

Contact Pin : Brass


SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

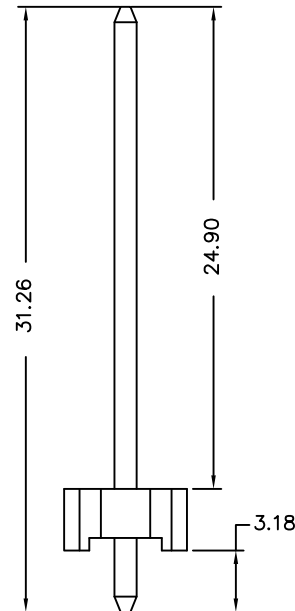

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H39-D31249031-1X02-LF
SERIES | | | | LEADFREE
| | | | 02 WAY
| | | | DIP 3.18mm
| | | | CONTACT 24.90mm
| | | | BASE 3.18mm
| | | | DIP 180°

DESCRIPTION: PIN HEADER 3.96mm H=3.18 W=6.35 SINGLE ROW, STRAIGHT TYPE