
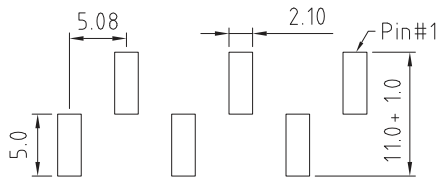

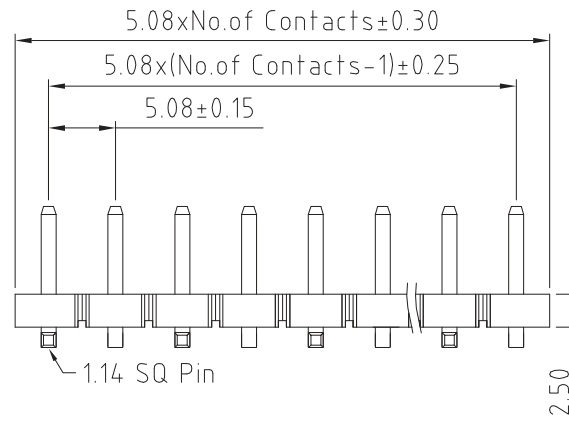


SPECIFICATIONS

CURRENT RATING 7.9 AMP
 INSULATOR RESISTANCE 5000 MEGOHMS MIN.
 CONTACT RESISTANCE 20m ohms MAX.
 DIELECTRIC WITHSTANDING 1500V AC/DC
 OPERATING TEMPERATURE -55°C TO +125°C
 CONTACT MATERIAL BRASS
 INSULATOR MATERIAL LCP+30% G/F, UL 94V-0
 PLATING MATT TIN OVER 30-50U" NICKEL
 SOLDERABILITY IR REFLOW: 280°C FOR 10 SEC
 MANUAL SOLDER: 380°C FOR 3-5 SEC

NOTES:

1. GOLD FLASH PLATING IS AVAILABLE UPON REQUEST,
 PLEASE CONTACT US FOR MORE INFORMATION.

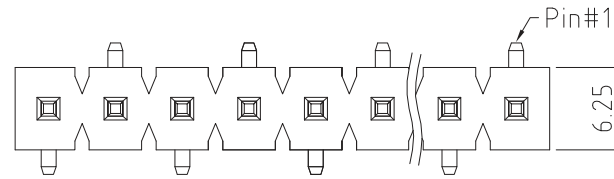

RECOMMENDED PCB SMT LAYOUT
 (TOLERANCE: ±0.05mm)

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ± 0.30
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

H51-V40X050-1XxxL-LF
 SERIES | LEADFREE L TYPE FOOT
 180°SMT | 1X02:02 WAY
 HIGH 4.05mm | 1X20:20 WAY
 CONTACT 5.0mm
 NON POST

DESCRIPTION: