
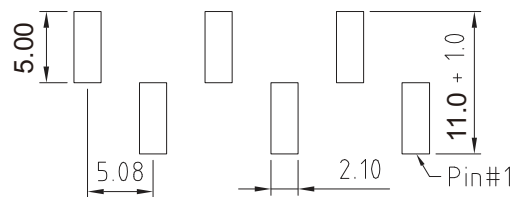

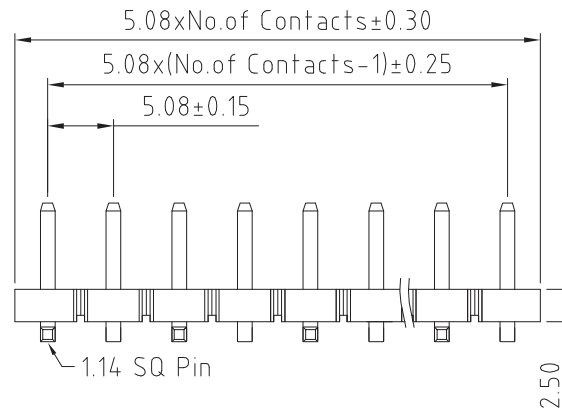


SPECIFICATIONS

CURRENT RATING 7.9 AMP  
 INSULATOR RESISTANCE 5000 MEGOHMS MIN.  
 CONTACT RESISTANCE 20m ohms MAX.  
 DIELECTRIC WITHSTANDING 1500V AC/DC  
 OPERATING TEMPERATURE -55°C TO +125°C  
 CONTACT MATERIAL BRASS  
 INSULATOR MATERIAL LCP+30% G/F, UL 94V-0  
 PLATING MATT TIN OVER 30-50U" NICKEL  
 SOLDERABILITY IR REFLOW: 280°C FOR 10 SEC  
 MANUAL SOLDER: 380°C FOR 3-5 SEC

NOTES:

1. GOLD FLASH PLATING IS AVAILABLE UPON REQUEST,  
 PLEASE CONTACT US FOR MORE INFORMATION.

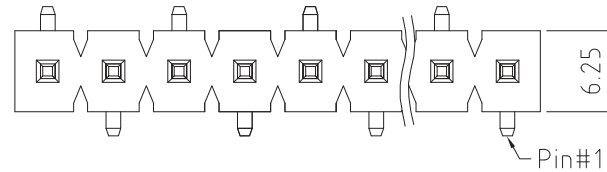

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
**煜倫股份有限公司**  
 www.morethanall.com

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PROJECTION

X. ± 0.30  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.10  
 ANG ±

照片框

ORDER INFORMATION

H51-V40X050-1XxxR-LF  
 SERIES | LEADFREE R TYPE FOOT  
 180°SMT | 1X02:02 WAY  
 HIGH 4.05mm | 1X20:20 WAY  
 CONTACT 5.0mm  
 NON POST

DESCRIPTION: