
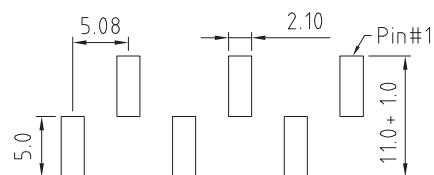
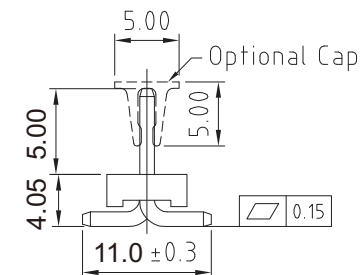
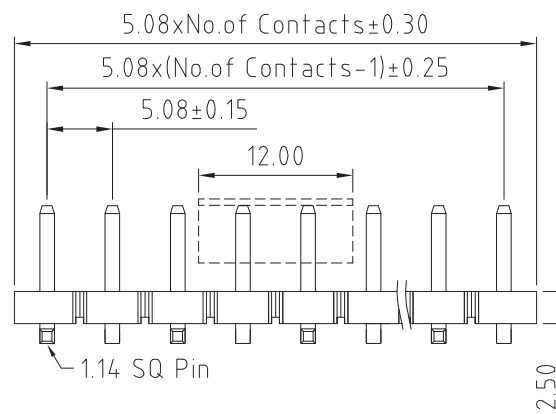


SPECIFICATIONS

CURRENT RATING 7.9 AMP
 INSULATOR RESISTANCE 5000 MEGOHMS MIN.
 CONTACT RESISTANCE 20m ohms MAX.
 DIELECTRIC WITHSTANDING 1500V AC/DC
 OPERATING TEMPERATURE -55°C TO +125°C
 CONTACT MATERIAL BRASS
 INSULATOR MATERIAL LCP+30% G/F, UL 94V-0
 PLATING MATT TIN OVER 30-50U" NICKEL
 SOLDERABILITY IR REFLOW: 280°C FOR 10 SEC
 MANUAL SOLDER: 380°C FOR 3-5 SEC

NOTES:

1. GOLD FLASH PLATING IS AVAILABLE UPON REQUEST,
 PLEASE CONTACT US FOR MORE INFORMATION.

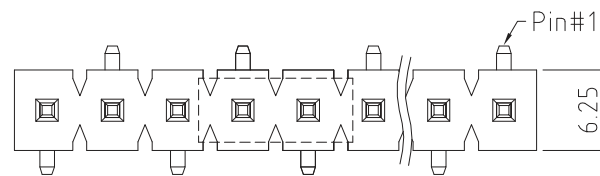

RECOMMENDED PCB SMT LAYOUT
 (TOLERANCE: ±0.05mm)

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PJECTION

照片框

ORDER INFORMATION

H51-V40X050C-1XxxL-LF
 SERIES | 180°SMT | HIGH 4.05mm | NON POST | CAP | CONTACT 5.0mm | LEADFREE L TYPE FOOT | 1X02:02 WAY | 1X20:20 WAY

DESCRIPTION: