
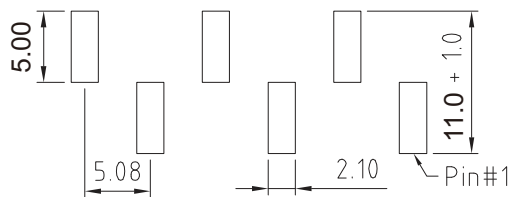
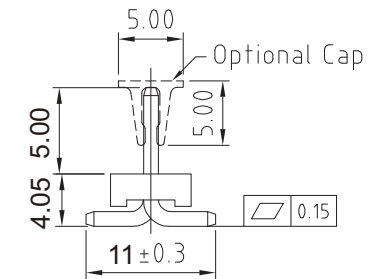
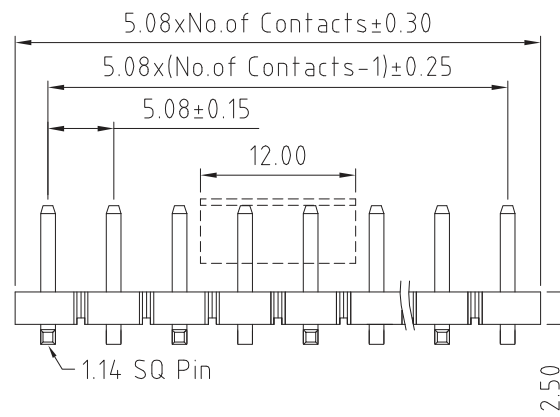


SPECIFICATIONS

CURRENT RATING 7.9 AMP  
 INSULATOR RESISTANCE 5000 MEGOHMS MIN.  
 CONTACT RESISTANCE 20m ohms MAX.  
 DIELECTRIC WITHSTANDING 1500V AC/DC  
 OPERATING TEMPERATURE -55°C TO +125°C  
 CONTACT MATERIAL BRASS  
 INSULATOR MATERIAL LCP+30% G/F, UL 94V-0  
 PLATING MATT TIN OVER 30-50U" NICKEL  
 SOLDERABILITY IR REFLOW: 280°C FOR 10 SEC  
 MANUAL SOLDER: 380°C FOR 3-5 SEC

NOTES:

- GOLD FLASH PLATING IS AVAILABLE UPON REQUEST, PLEASE CONTACT US FOR MORE INFORMATION.

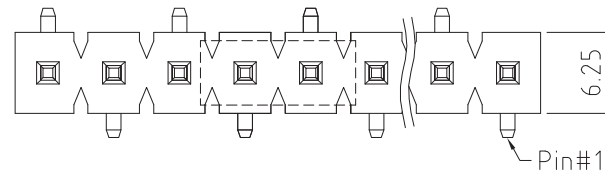

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
**煜倫股份有限公司**  
[www.morethanall.com](http://www.morethanall.com)

**RoHS Compliant**

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PROJECTION

TOLERANCES ARE

X. ± 0.30  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.10  
 ANG ±

照片框

ORDER INFORMATION

**H51-V40X050C-1XxxR-LF**  
 SERIES | 180°SMT | HIGH 4.05mm | NON POST | CAP | CONTACT 5.0mm | LEADFREE R TYPE FOOT | 1X02:02 WAY | 1X20:20 WAY

DESCRIPTION: