
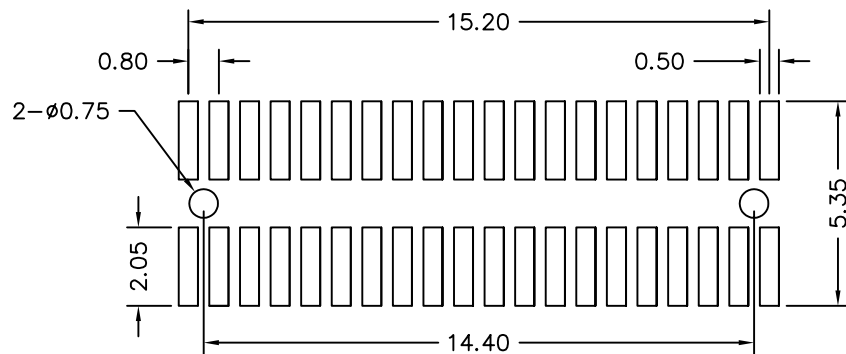
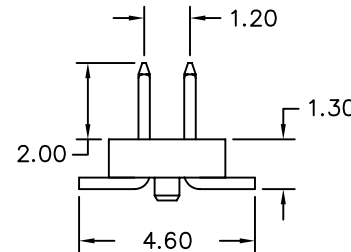


MATERIAL
 Insulator : NYLON 9T
 Contact Pin : Brass

SPECIFICATION
 Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 15mΩMax.
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

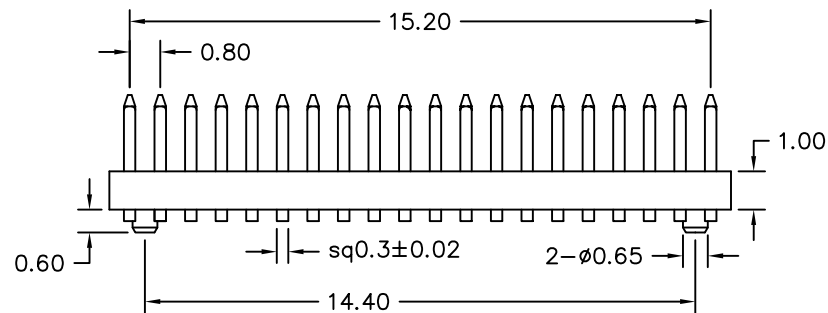

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

H8-V13P-2X20-LF
 SERIES POST HIGH 1.3mm 180°SMT
 LEADFREE
 40 WAY

DESCRIPTION: PIN HEADER 0.8*1.2mm SMT S/T TYPE, DUAL ROWS HEIGHT=1.0mm