
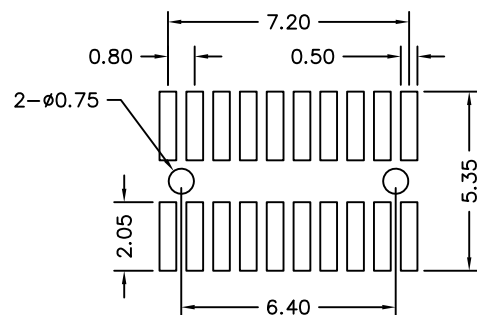
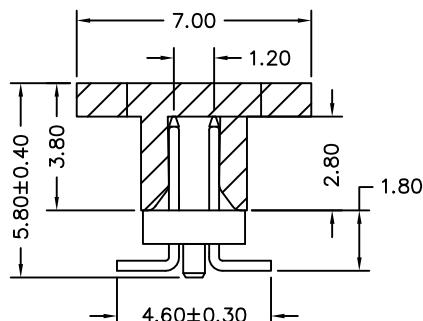
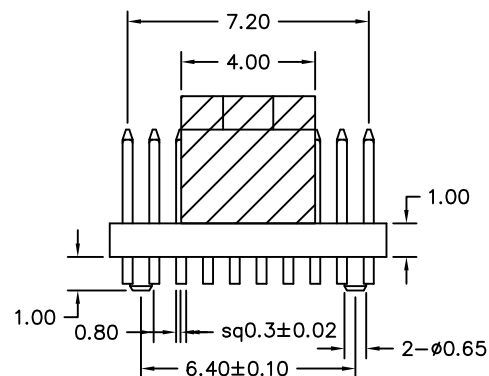


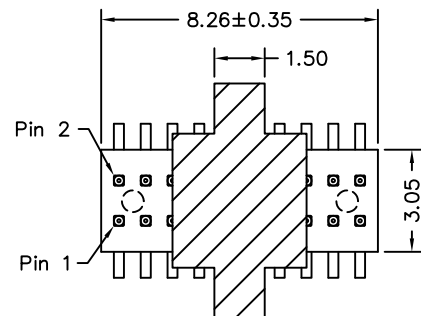

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

H8-V18PS01C-2X10-LF
SERIES POST HIGH 1.8mm
CAP SEMI GOLD 1u"
20 WAY
LEADFREE
180°SMT

DESCRIPTION: PIN HEADER 0.8*1.2mm SMT S/T TYPE, DUAL ROWS HEIGHT=1.0mm,CAP+TUBE