

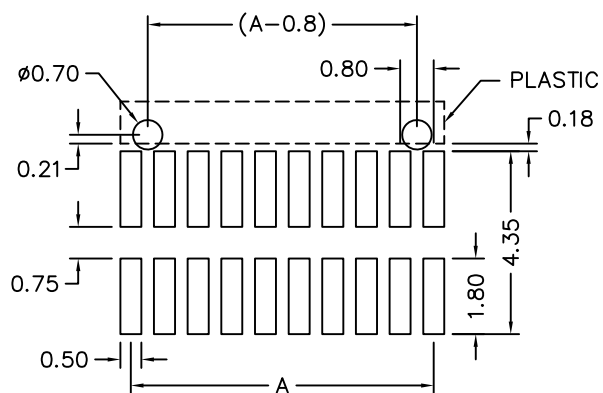
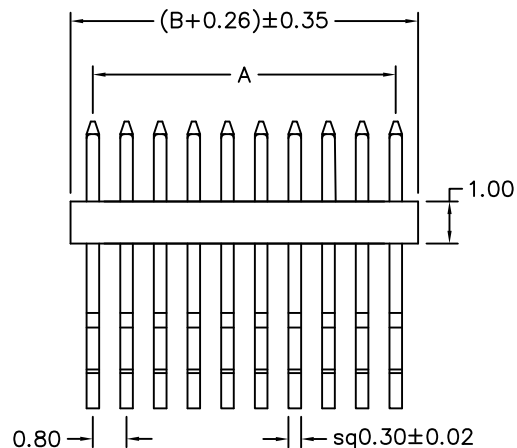


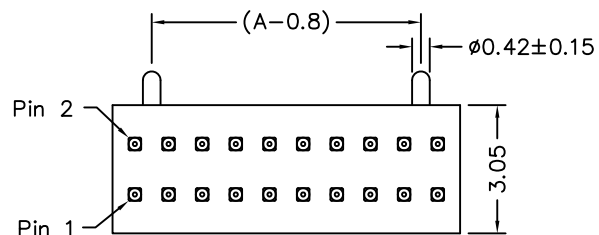

Recommended P.C.B Layout

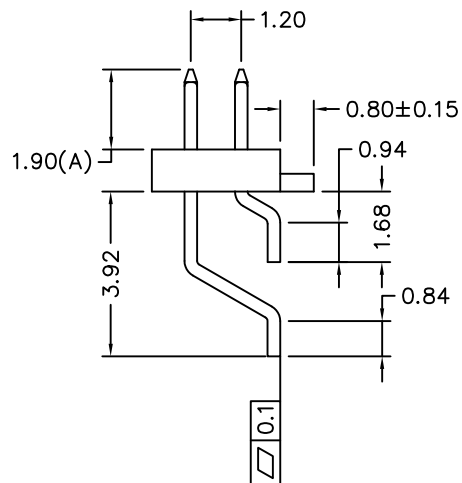

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 15mΩMax.

Dielectric Voltage : AC 500V for one minute

POLES	DIM A	DIM B	POLES	DIM A	DIM B	POLES	DIM A	DIM B
5	3.2	4.0	21	16.0	16.8	37	28.8	29.6
6	4.0	4.8	22	16.8	17.6	38	29.6	30.4
7	4.8	5.6	23	17.6	18.4	39	30.4	31.2
8	5.6	6.4	24	18.4	19.2	40	31.2	32.0
9	6.4	7.2	25	19.2	20.0	41	32.0	32.8
10	7.2	8.0	26	20.0	20.8	42	32.8	33.6
11	8.0	8.8	27	20.8	21.6	43	33.6	34.4
12	8.8	9.6	28	21.6	22.4	44	34.4	35.2
13	9.6	10.4	29	22.4	23.2	45	35.2	36.0
14	10.4	11.2	30	23.2	24.0	46	36.0	36.8
15	11.2	12.0	31	24.0	24.8	47	36.8	37.6
16	12.0	12.8	32	24.8	25.6	48	37.6	38.4
17	12.8	13.6	33	25.6	26.4	49	38.4	39.2
18	13.6	14.4	34	26.4	27.2	50	39.2	40.0
19	14.4	15.2	35	27.2	28.0			
20	15.2	16.0	36	28.0	28.8			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

H8-WP-2Xxx-LF
SERIES LEADFREE
2X05:10 WAY
2X50:100 WAY
POST
90°SMT

DESCRIPTION: PIN HEADER 0.8*1.2mm HEIGHT=1.0mm, WITH POST