



10~30 pin : 0.20mm  
32~68 pin : 0.30mm

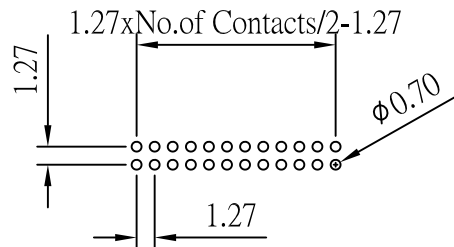

Recommended P.C. Board  
Hole Layout

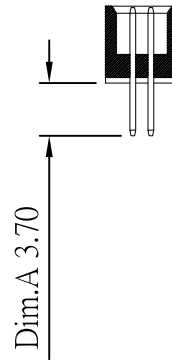

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)  
Insulator Resistance: 5000 Megohms min  
Contact Resistance: 20 m ohms max  
Dielectric Withstanding: 500 V AC  
Operating Temperature: - 40° ~ +125° C  
Max Processing Temp: 230° C for 60 seconds  
Max Processing Temp: 260° C for 10 seconds  
Contact Material: Copper Alloy  
Insulator Material: Polyester, UL 94V-0  
Standard: LCP  
Finish: Standard: Gold Flash all over

Table-1

CIRCUITS	
10	30
12	34
14	40
16	44
20	50
24	60
26	64
28	68

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

照片框

ORDER INFORMATION

HAB-DD37-xxx-LF  
SERIES | LEADFREE  
010~068WAY  
DIP 3.70mm  
DIP 180°

DESCRIPTION: