
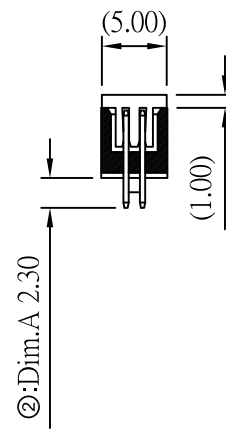


Recommended P.C. Board Hole Layout

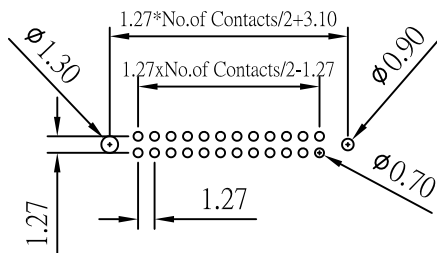

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester,UL 94V-0
 Standard: LCP
 Finish: Standard:Gold Flash all over

Table-1

CIRCUITS	
10	30
12	34
14	40
16	44
20	50
24	60
26	64
28	68

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
 X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

HAB-DPC-xxx-LF
 SERIES | CAP | LEADFREE
 POST | 010-068WAY
 180°SMT

DESCRIPTION: