


Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature:  $-40^{\circ} \sim +125^{\circ} \text{C}$   
 Max Processing Temp:  $230^{\circ} \text{C}$  for 60 seconds  
 Max Processing Temp:  $260^{\circ} \text{C}$  for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: L.C.P

Finish: Gold Plated  
 Standard: Gold Flash all over

Recommended P.C. Board Hole Layout

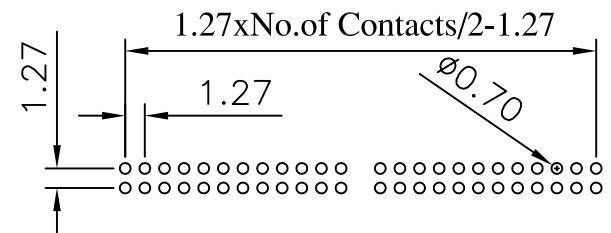

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X.  $\pm$   
 .X  $\pm$   
 .XX  $\pm$   
 .XXX  $\pm$   
 ANG  $\pm$

照片框

ORDER INFORMATION

HAB-R-2Xxx-LF  
 SERIES | LEADFREE  
 2X03:06WAY  
 2X50:100WAY  
 DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: