

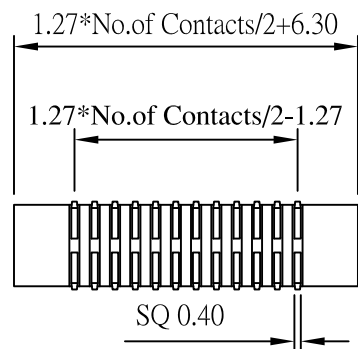
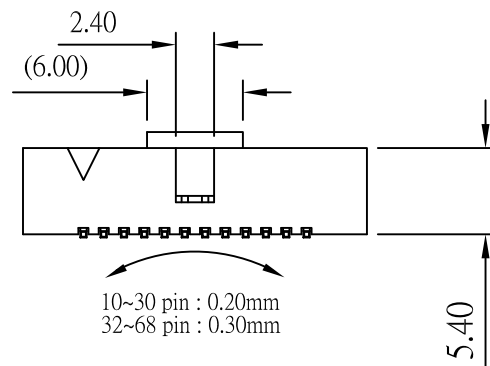


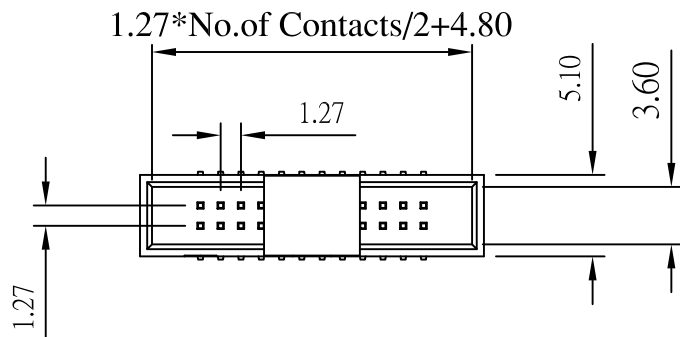


Current Rating and Voltage: 1 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +125° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester,UL 94V-0  
 Standard: LCP  
 Finish: Standard:Gold Flash all over

Table-1

| CIRCUITS |    |
|----------|----|
| 10       | 30 |
| 12       | 34 |
| 14       | 40 |
| 16       | 44 |
| 20       | 50 |
| 24       | 60 |
| 26       | 64 |
| 28       | 68 |

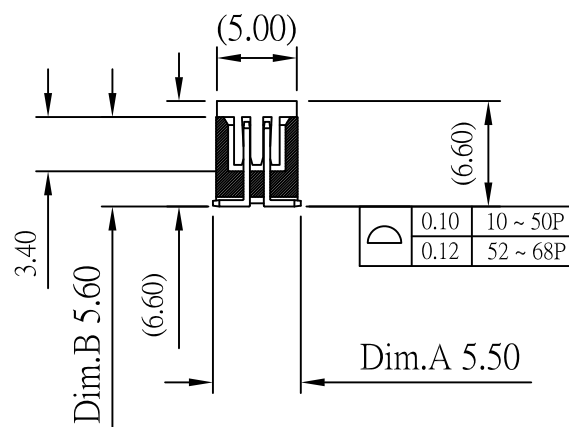

Recommended P.C. Board  
SMD Layout

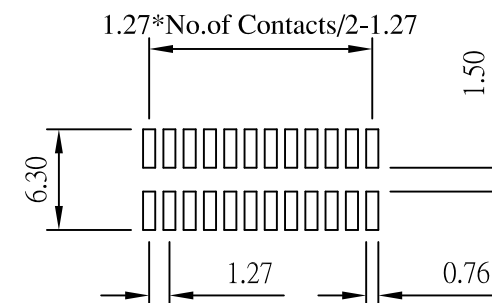

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HAB-VC-xxx-LF  
 SERIES LEADFREE  
 010~100WAY  
 CAP  
 180° SMT

DESCRIPTION: