

NOTES:

Rated Current:1.0AMP

Contact Resistance:20mΩ max

Withstand Voltage:500V AC/DC






Insulation Resistance:1000MΩ min

Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze

Contact plating: Au Or Sn over Ni

Insulator Material:PBT+30%G.F UL94V-0

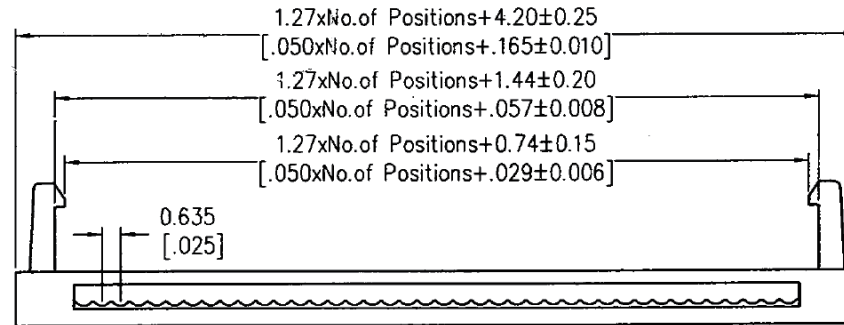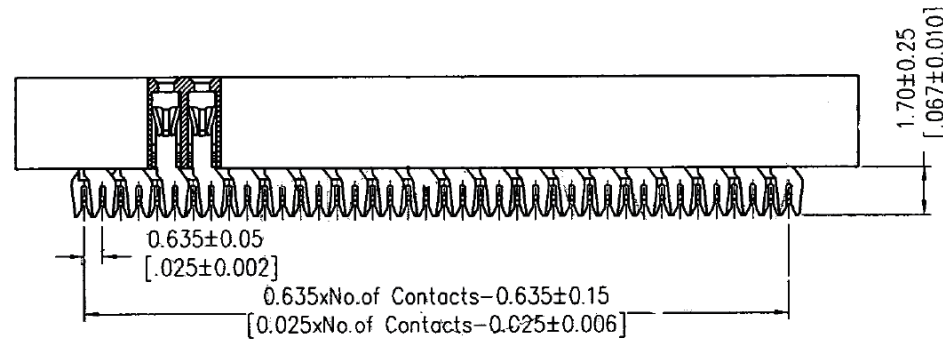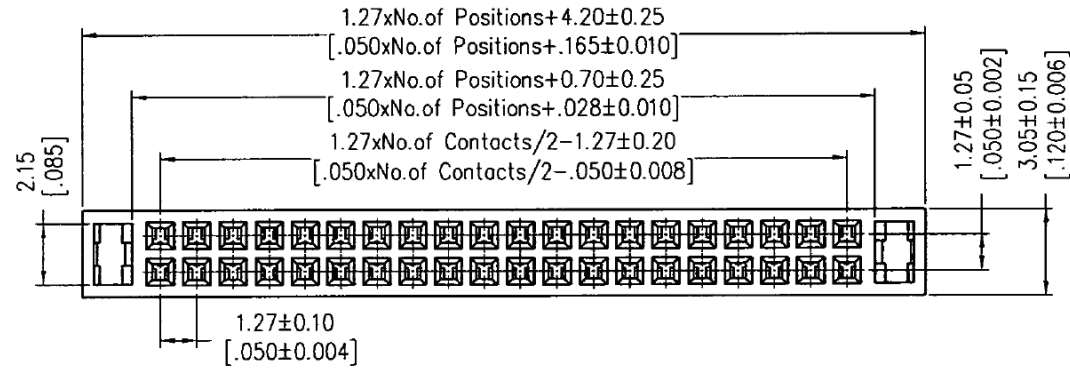

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

照片框

ORDER INFORMATION

HAF-C2AX-xxx-LF
SERIES
LEADFREE
006~080 WAY
NON NOSE
ASSEMBLY
TWO TYPE

DESCRIPTION: