

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:100V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:5,000M ohm. min.

Withstanding Voltage:1,000V AC For One Minute





Operating Temperature Range:-40°C ~ +105°C

Materials and Finish

Insulator:High Temp. Plastic(UL94V-0)

Contact:Copper Alloy

Plated:Gold Plated

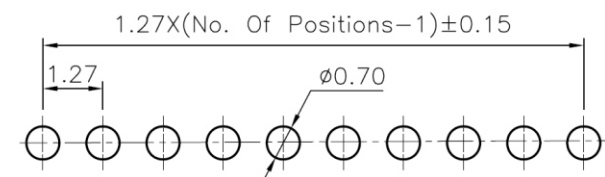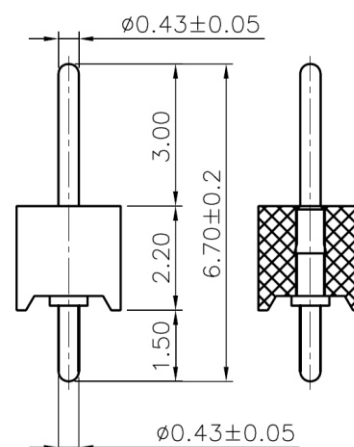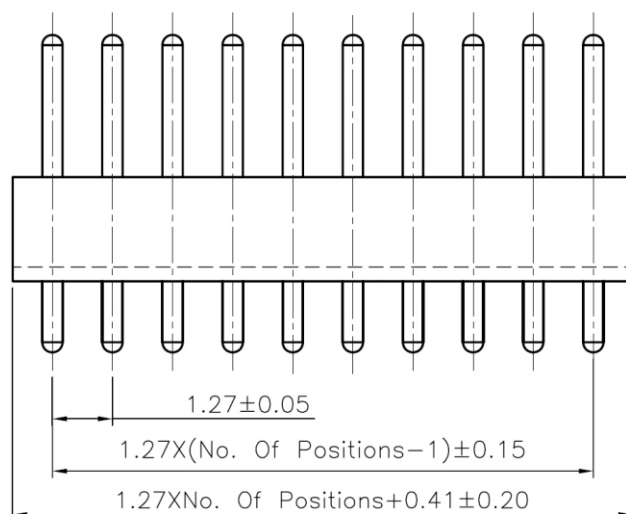

P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HASP-D0673015-1Xxx-LF

SERIES

DIP 180°

CONTACT 3.0mm

TOTAL 6.7mm

LEADFREE

1X02:02 WAY

1X50:50 WAY

DIP 1.5mm

DESCRIPTION: