


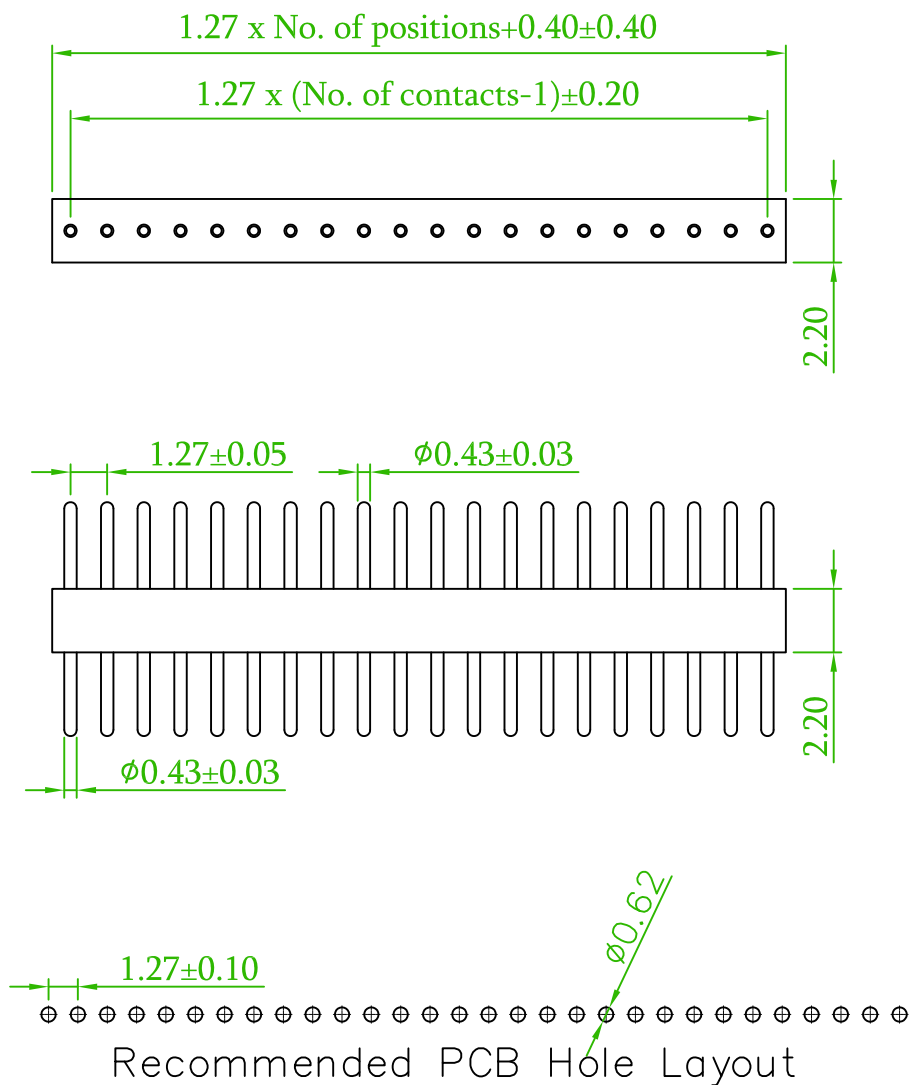

### Specifications

Current Rate: 1 AMP

Insulation Resistance:  $\geq 1000M\Omega$  at  $V=100V$ .

Contact Resistance:  $\leq 10m\Omega$ /Contact


Dielectric voltage: 60V AC for one minute

Operation Temperature:  $-40^{\circ}C$  to  $+105^{\circ}C$

### Material

Insulator: PPS(UL94V-0)

Contact Pin: Copper Alloy

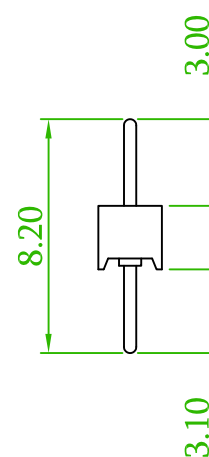

照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X,  $\pm$   
.X  $\pm$  0.30  
.XX  $\pm$  0.25  
.XXX  $\pm$   
ANG  $\pm$

ORDER INFORMATION

HASP-DG-1Xxx-LF

SERIES

LEADFREE

1X02:02 WAY

1X50:50 WAY

GOLD  
DIP 180°

DESCRIPTION: MACHINE PIN HEADER STRIP 1.27mm