


P. C. B LAYOUT

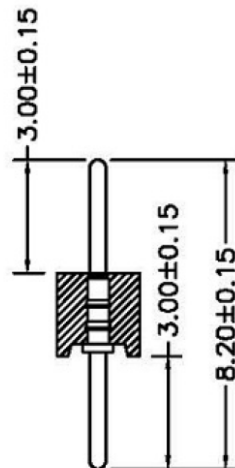

材料数据

材质:

Pin: 黄铜, C3604

电镀:

镀锡: 2 μm/80 μ" 镍, 5 μm/200 μ 锡

镀金: 2 μm/80 μ" 镍, 0.8 μ" 金

阻燃等级: PPS UL94V-0

电气性能

额定电流: 1Amps/contact max.

接触电阻: ≤10mΩ/contact

绝缘电阻: ≥1000MΩ at V=100V

工作电压: 60VAC/DC

物理性能:

机械寿命: min 500

工作温度范围: -40° C to +105° C

焊接温度: +255° C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±
X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HASP-Dx-1X50-LF

SERIES LEADFREE

50 WAY

G: GOLD

T: TIN

DIP 180°

DESCRIPTION: 1.27mm X 1.27mm 瑞士公針 DIP 180 無柱單排