

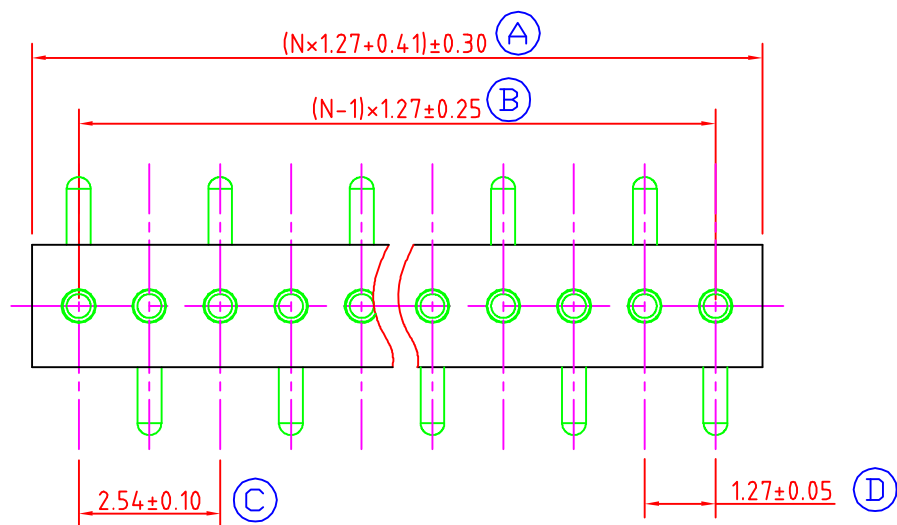


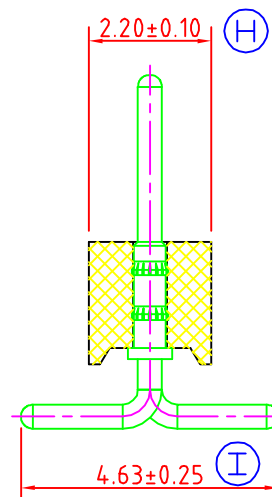

N=Number of contacts

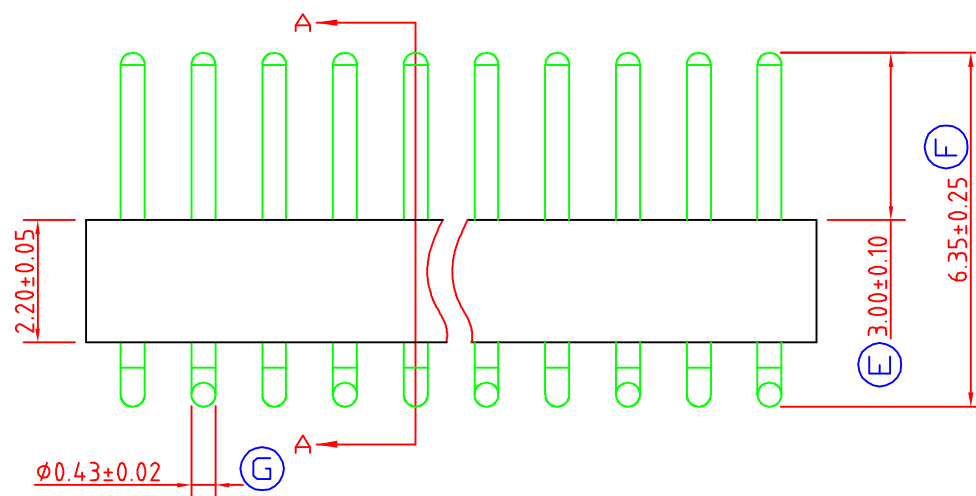

Material

- Insulator: NYLON46 30G/F UL94-0, colour black.
- Receptacle contact:
- Pin contact: Screw-machined brass or phosphor bronze, gold or tin-lead plated over 2-3um nickel

Electrical

- Rated current(A):1
- Rated voltage: 100VRMS/150VDC
- Max contact resistance(mΩ):20mΩ
- Insulation resistance:10000MΩmin
- Dielectric strength: 1000VRMS min
- Air and creepage(min): 0.4/0.5
- Capacitance(pF): 1

Environmental

- Operating temperature: -55/+125°C
- Vibration(10-2000Hz,15g): no electrical discontinuity>1us
- Shock:(50g): no electrical discontinuity>1us
- Solderability(IEC 68-2-54 Ta):235°C,5s
- Resistance to soldering heat:(IEC 68-2-20Tb): 260°C,50s
- Resistance to atmospheric corrosion: IEC 68-2-42 and 43
- Climatic category(IEC): 55/125/21

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±

照片框

ORDER INFORMATION

HASP-VX-1XxxR-LF

SERIES

LEADFREE
R TYPE FOOT
1X02:02 WAY
1X50:50 WAY
NON POST
180°SMT

DESCRIPTION: